


# MAXON®

# Slidelift

## Spare Parts Catalogue

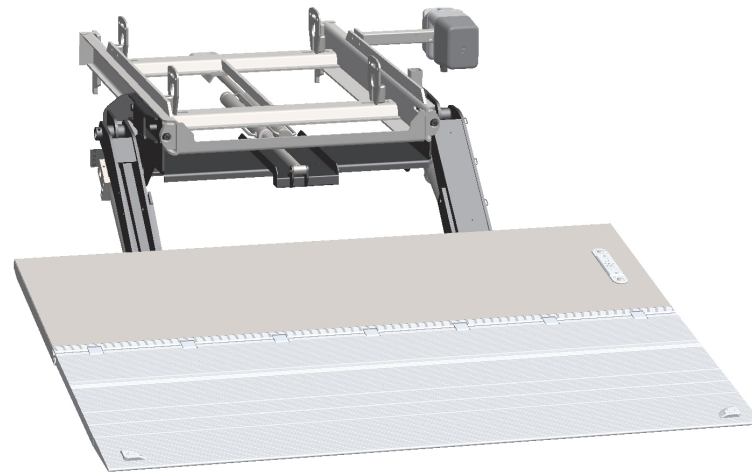


**GPST 44 X1**  
up to Series 10


**X1**  
TECHNOLOGY

Document no. S 20 909 841  
© Sörensen Hydraulik GmbH  
2013


# Slideframe

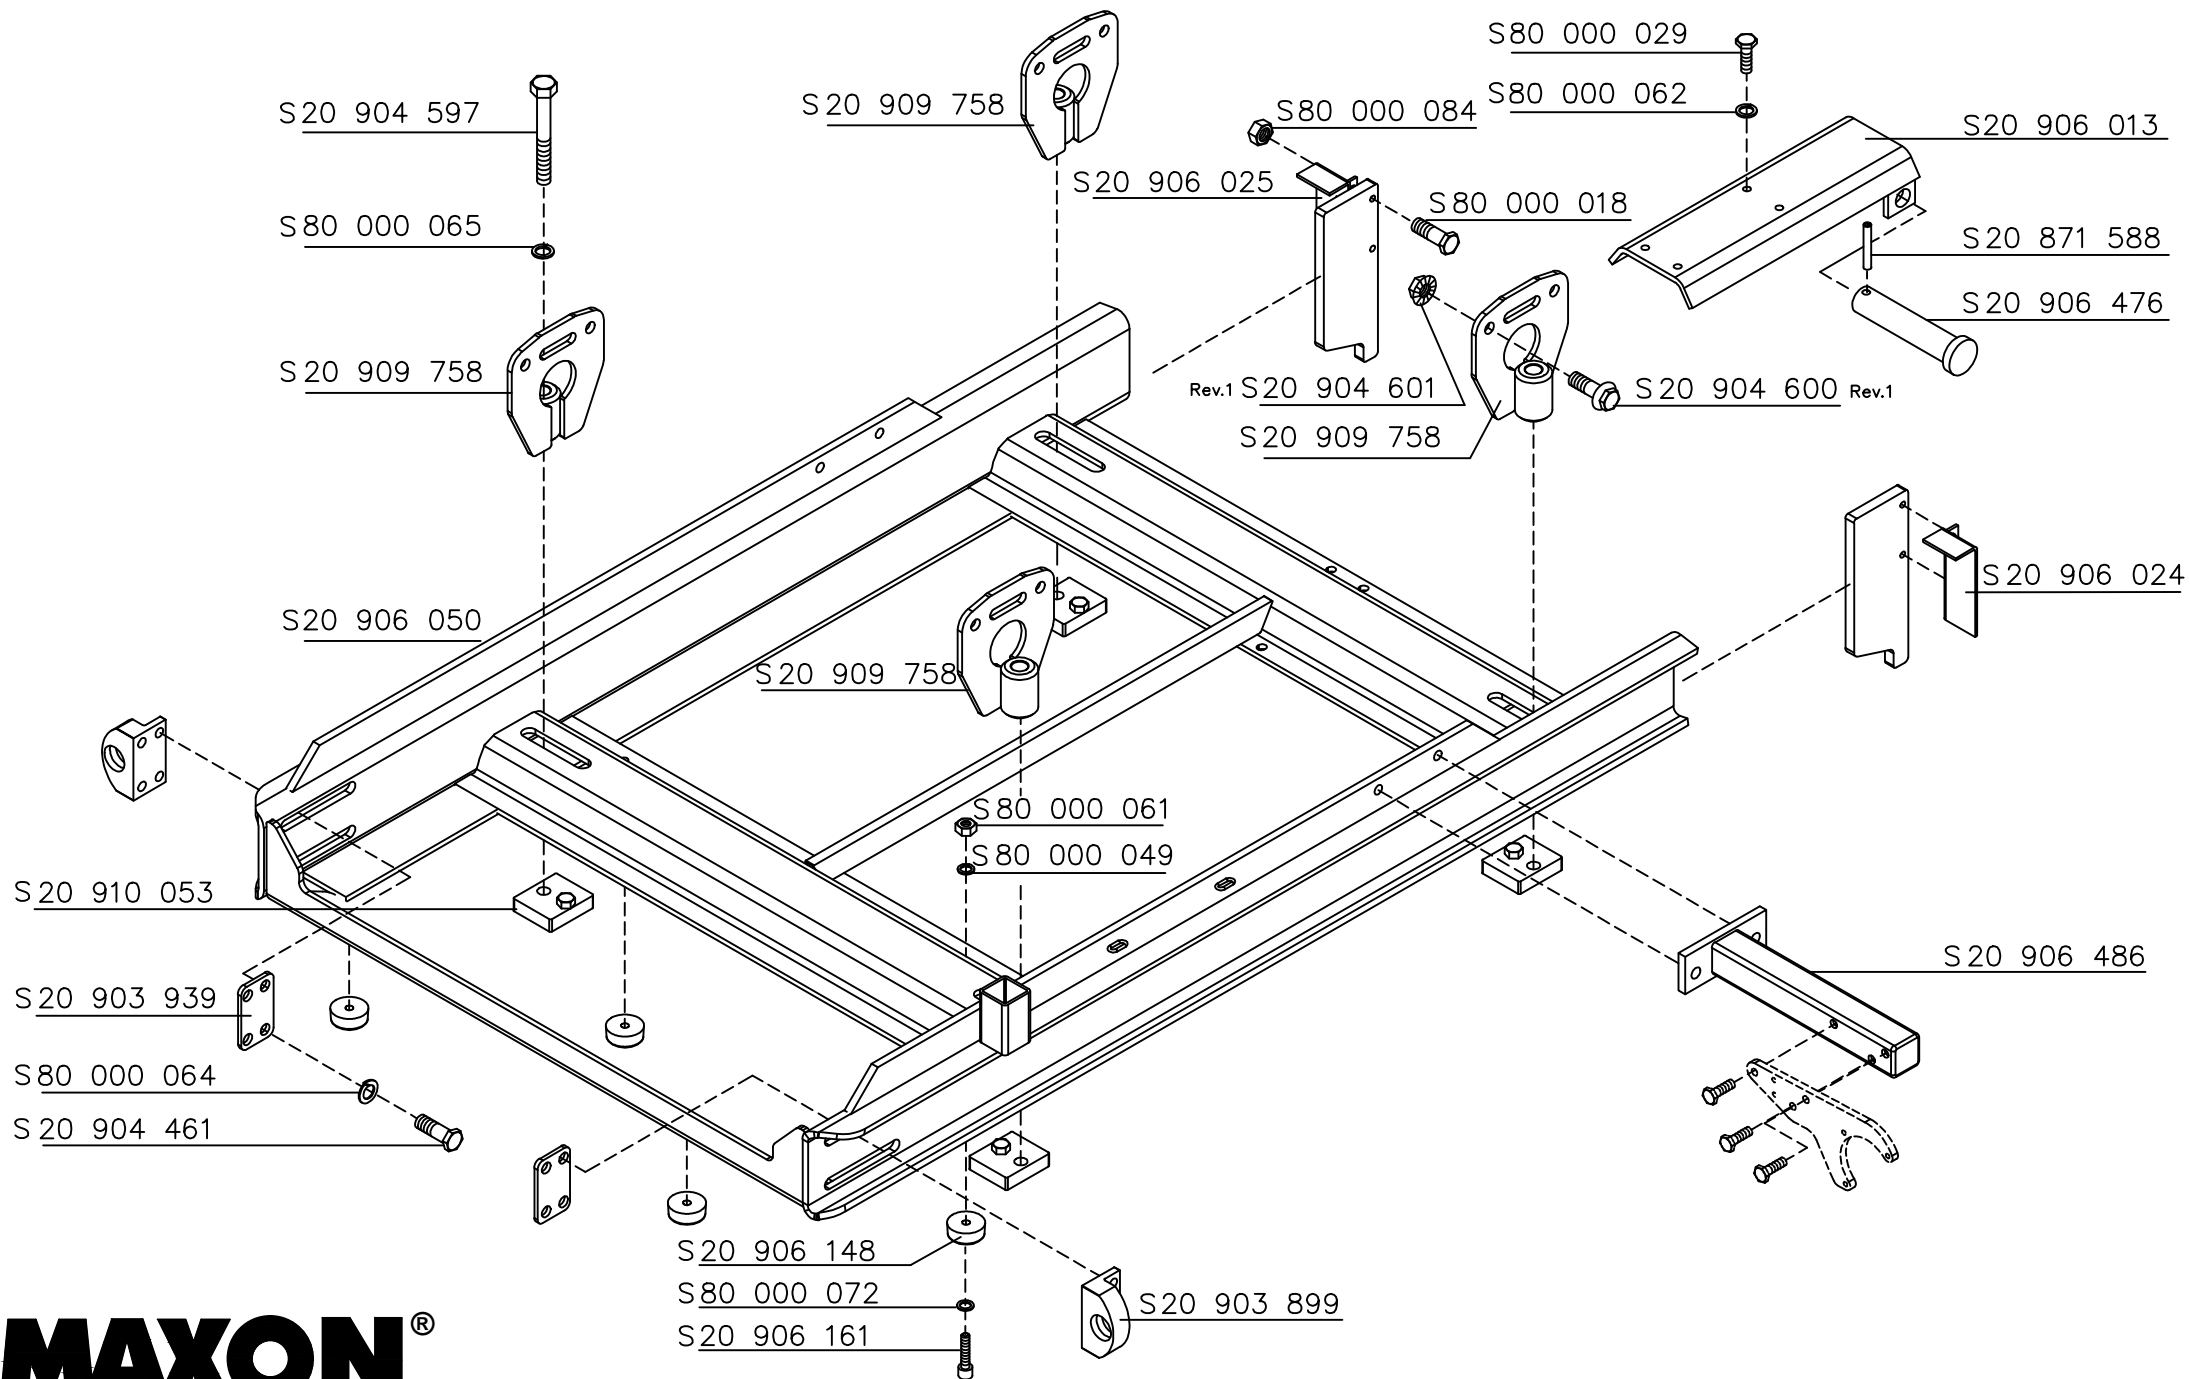


# Wagon

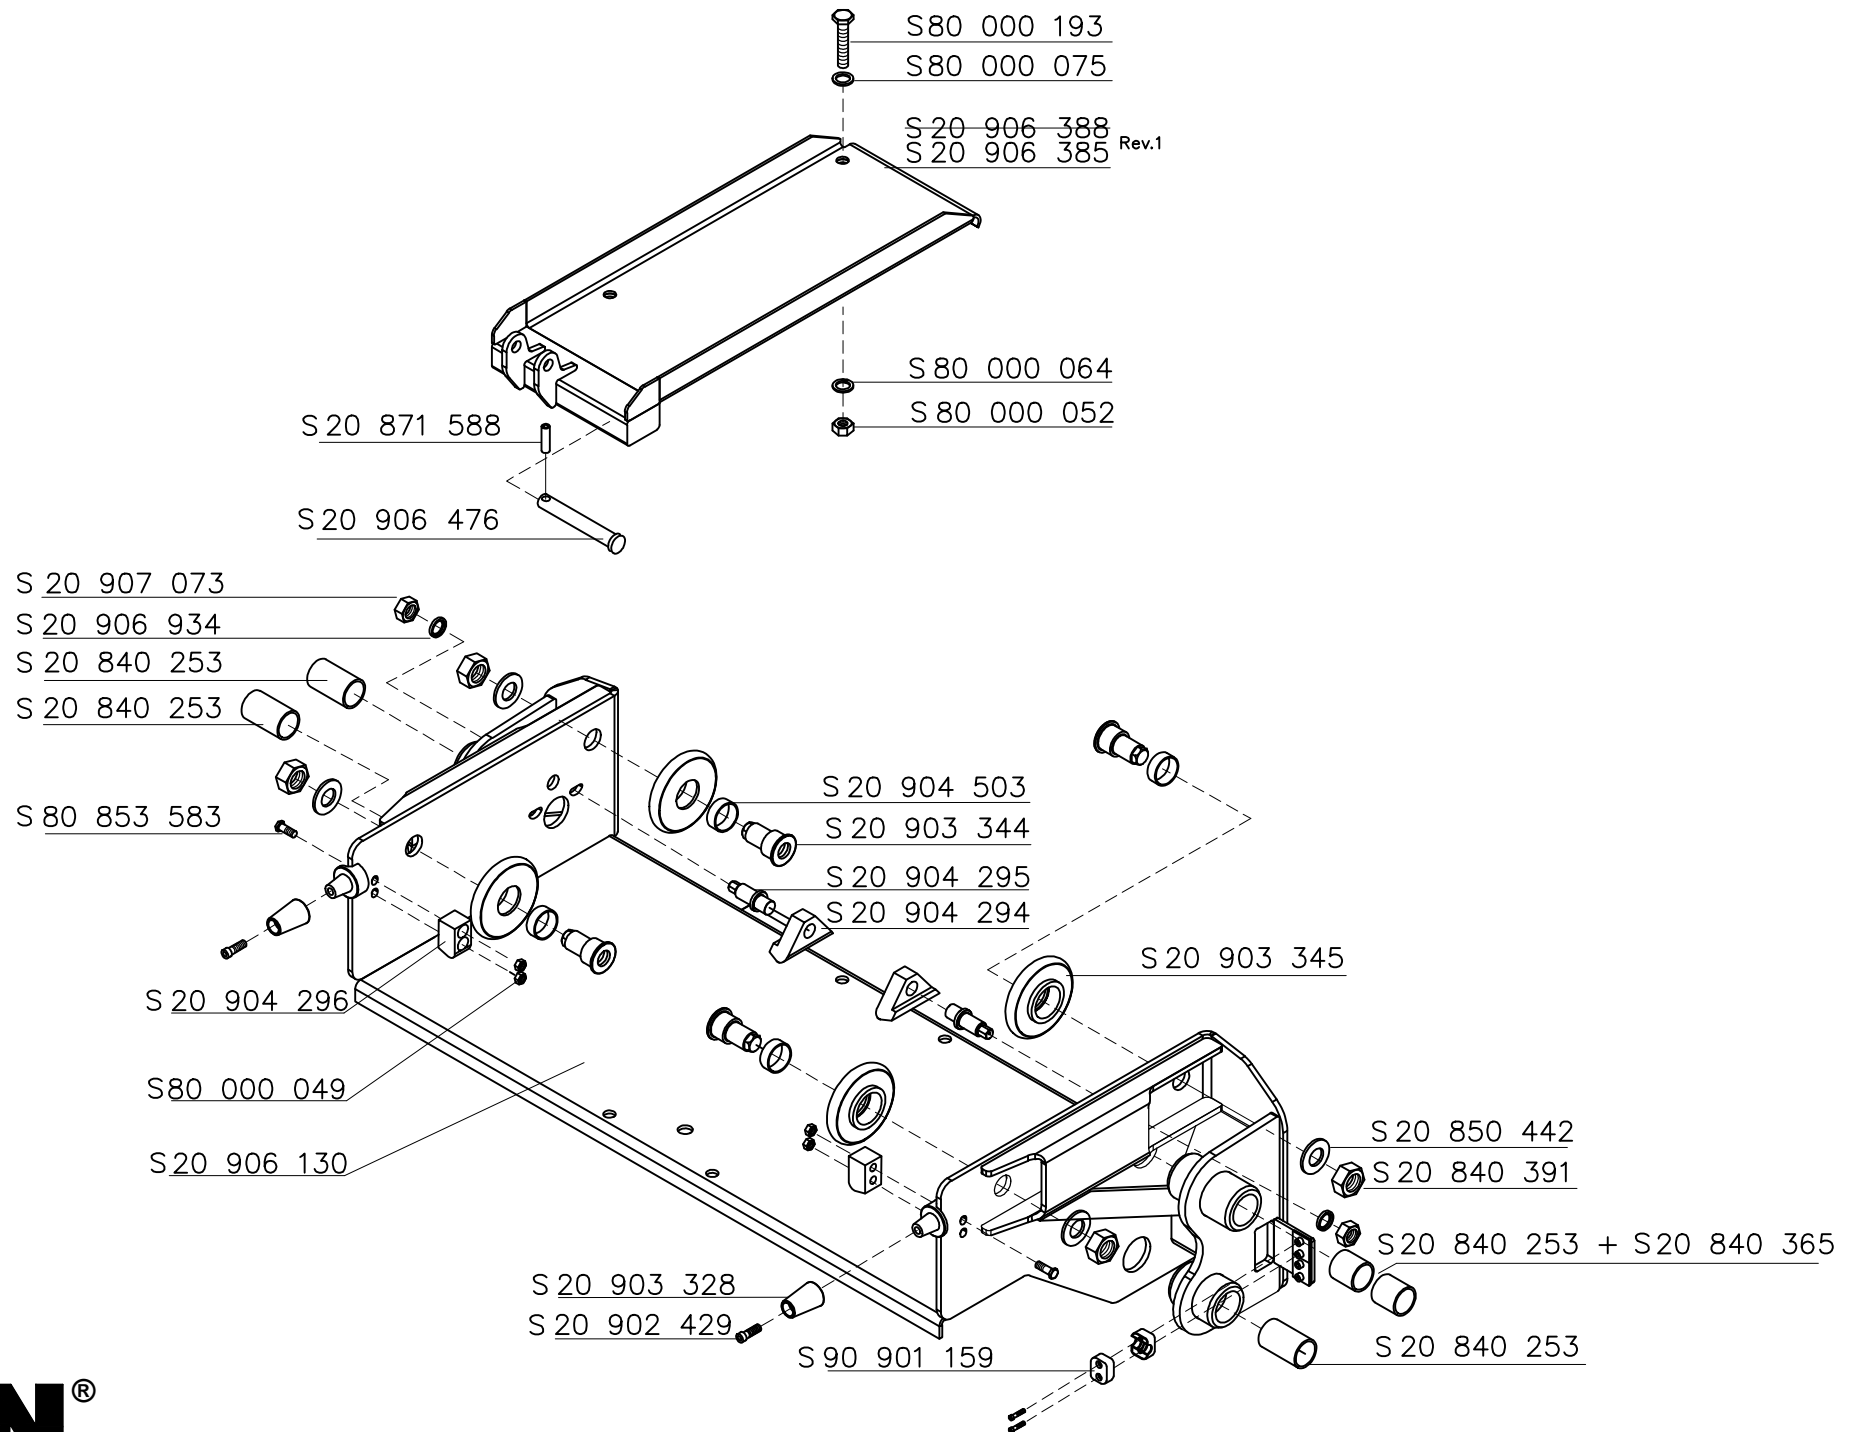

# Lifting mechanism

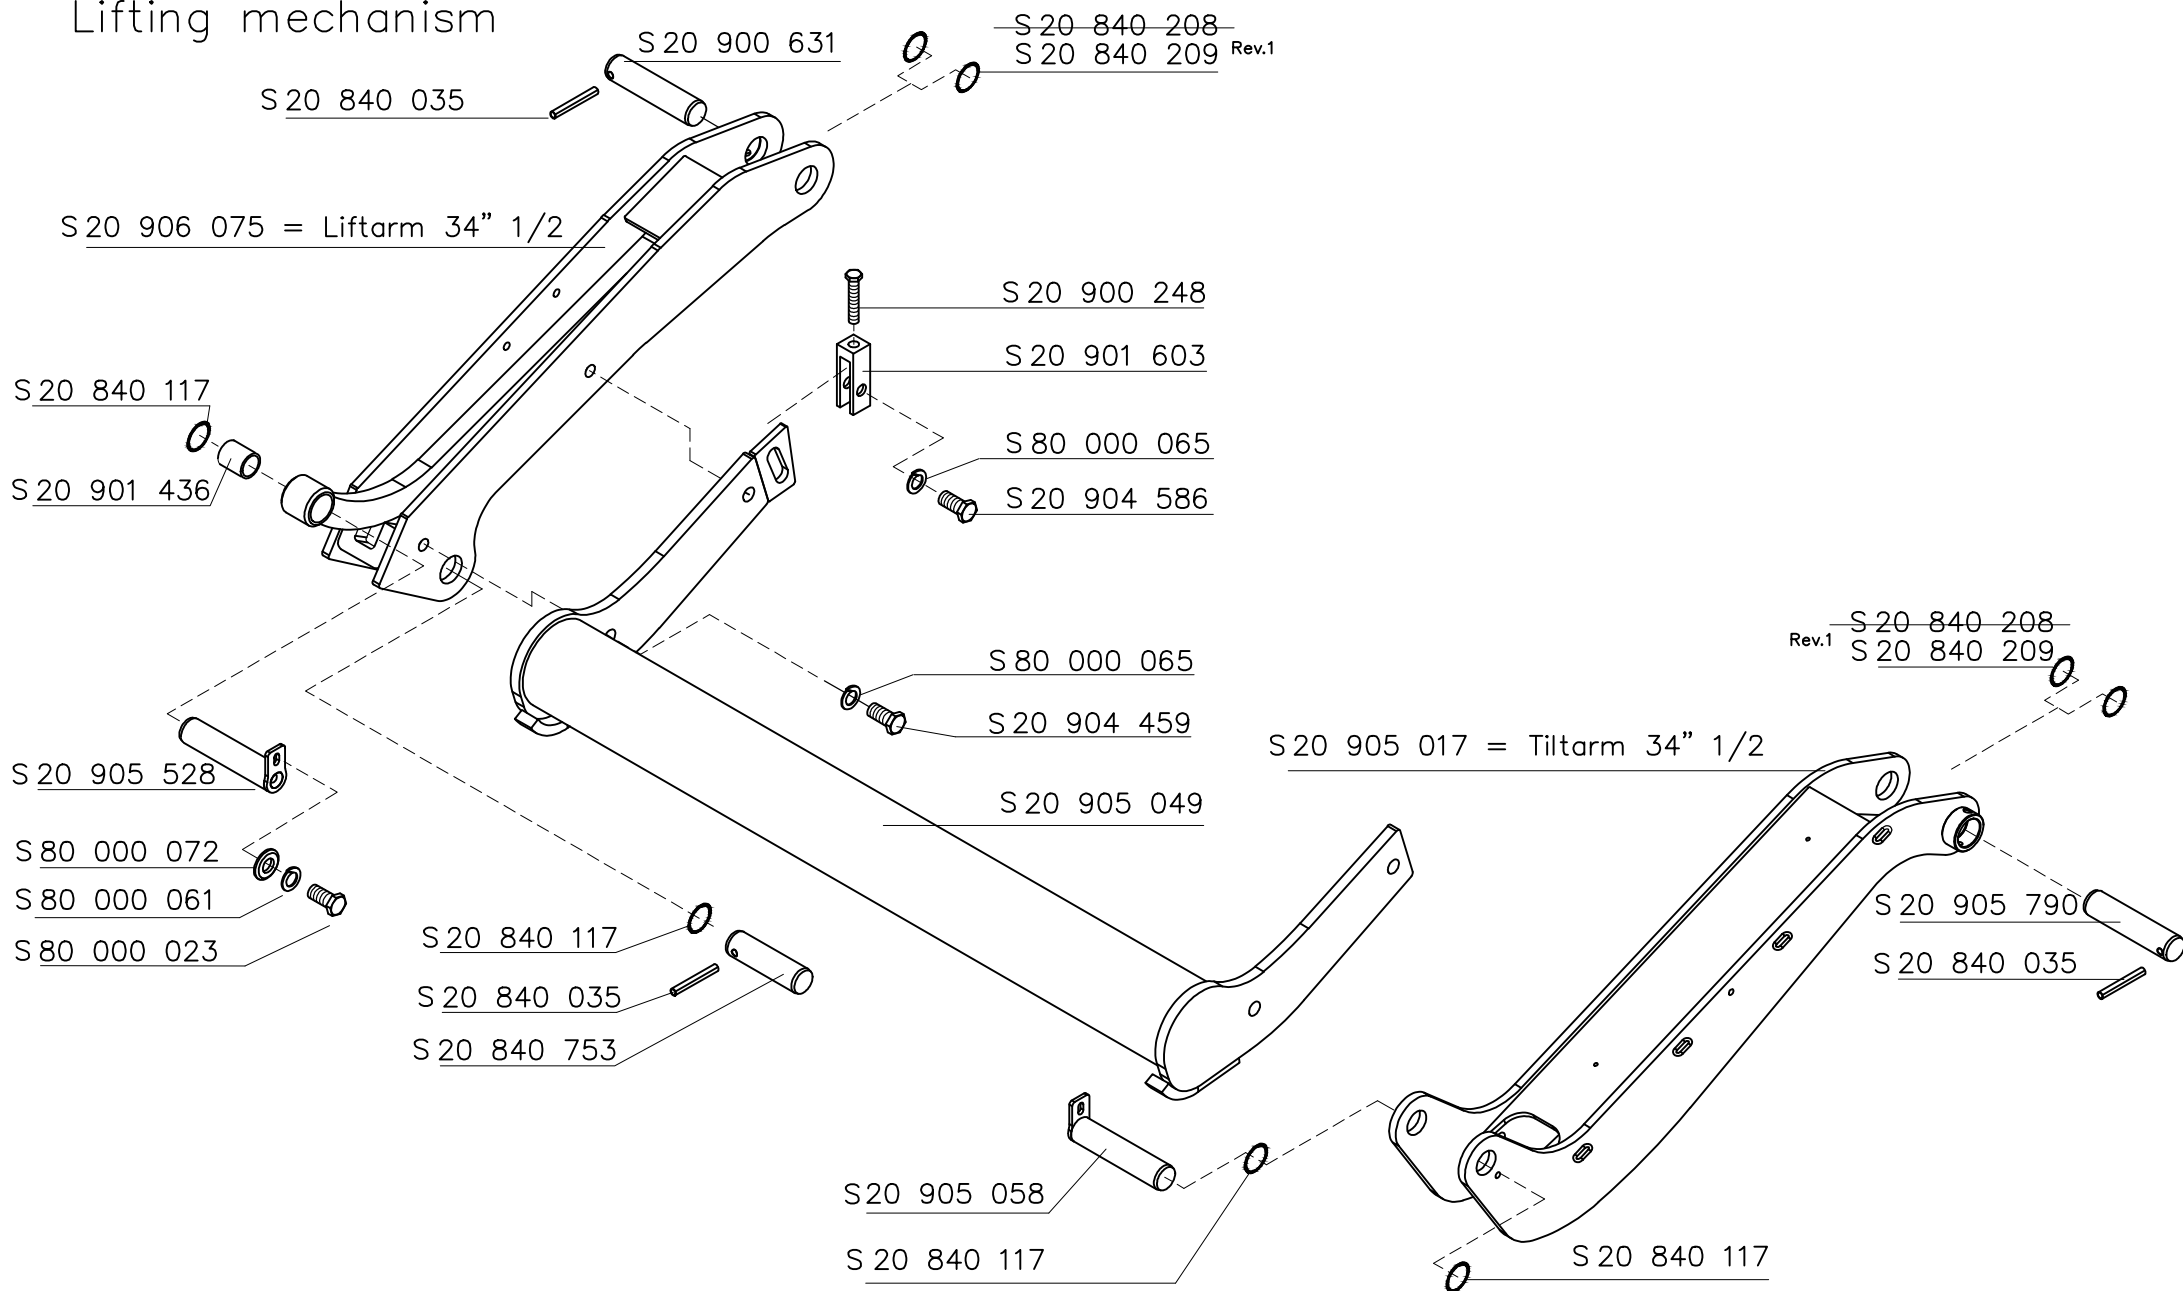


Sliding cylinder  
S 20 906 150

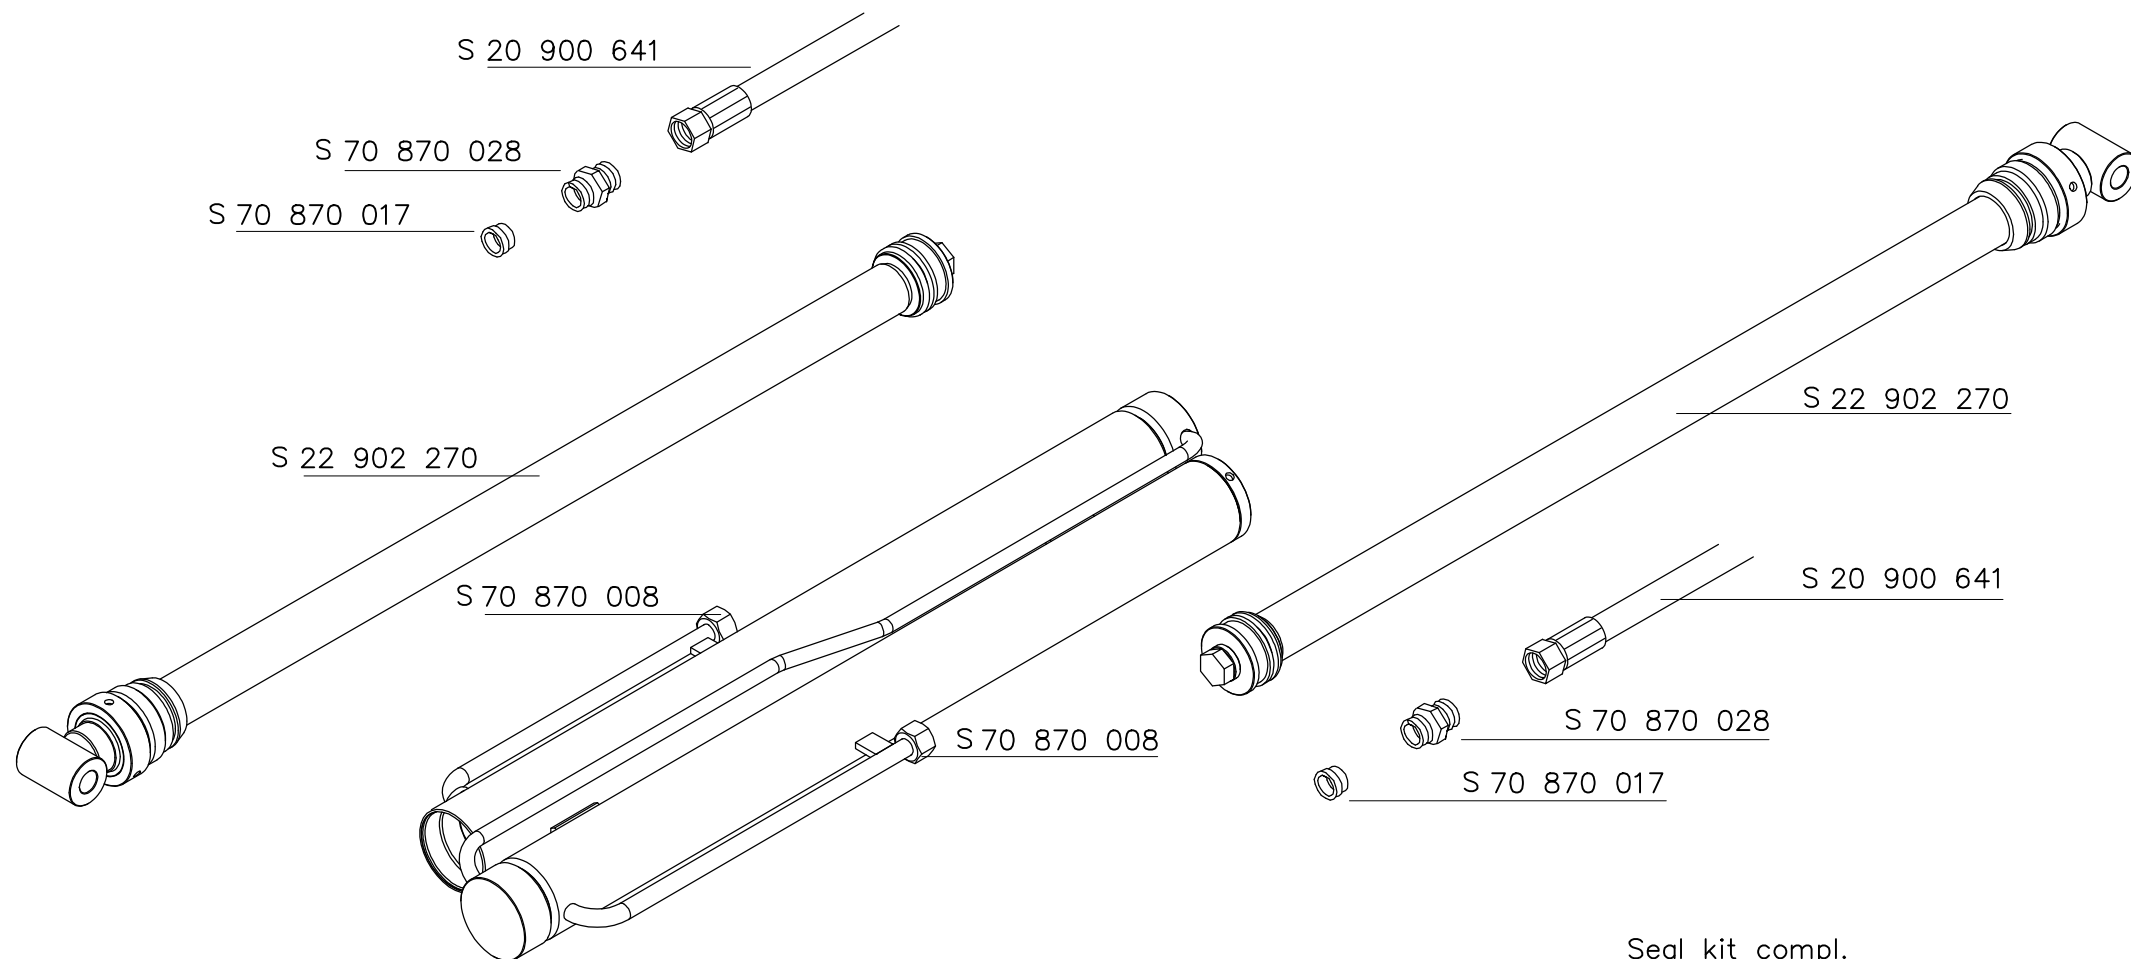

Seal kit compl.  
S22 902 269

# Tilting cylinder S 20 905 492

Seal kit compl.  
S 22 902 308

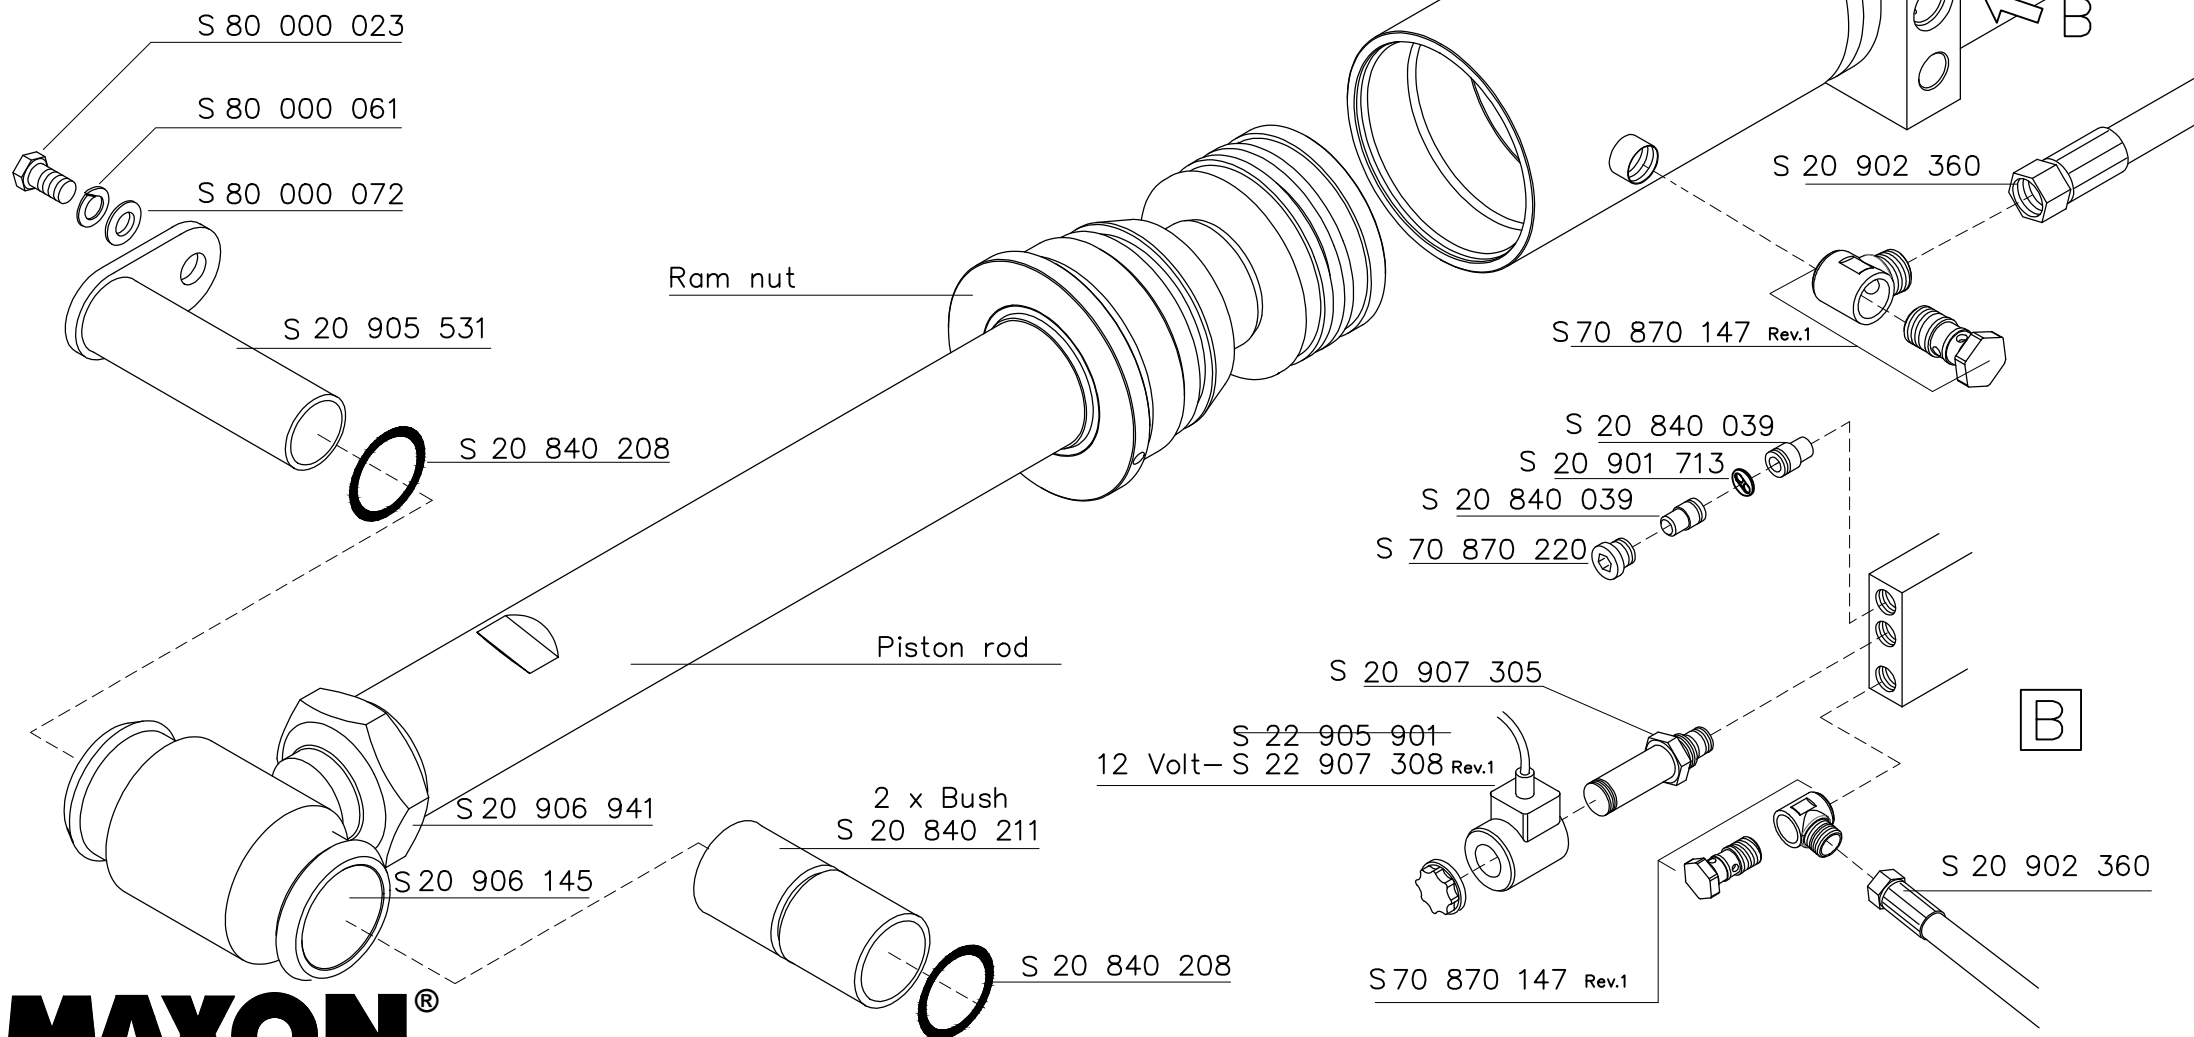


**MAXON**<sup>®</sup>  
GPST 44 X1

# Lift cylinder liftarm 34"1/2

S 20 905 489

Seal kit compl.

S 22 902 275

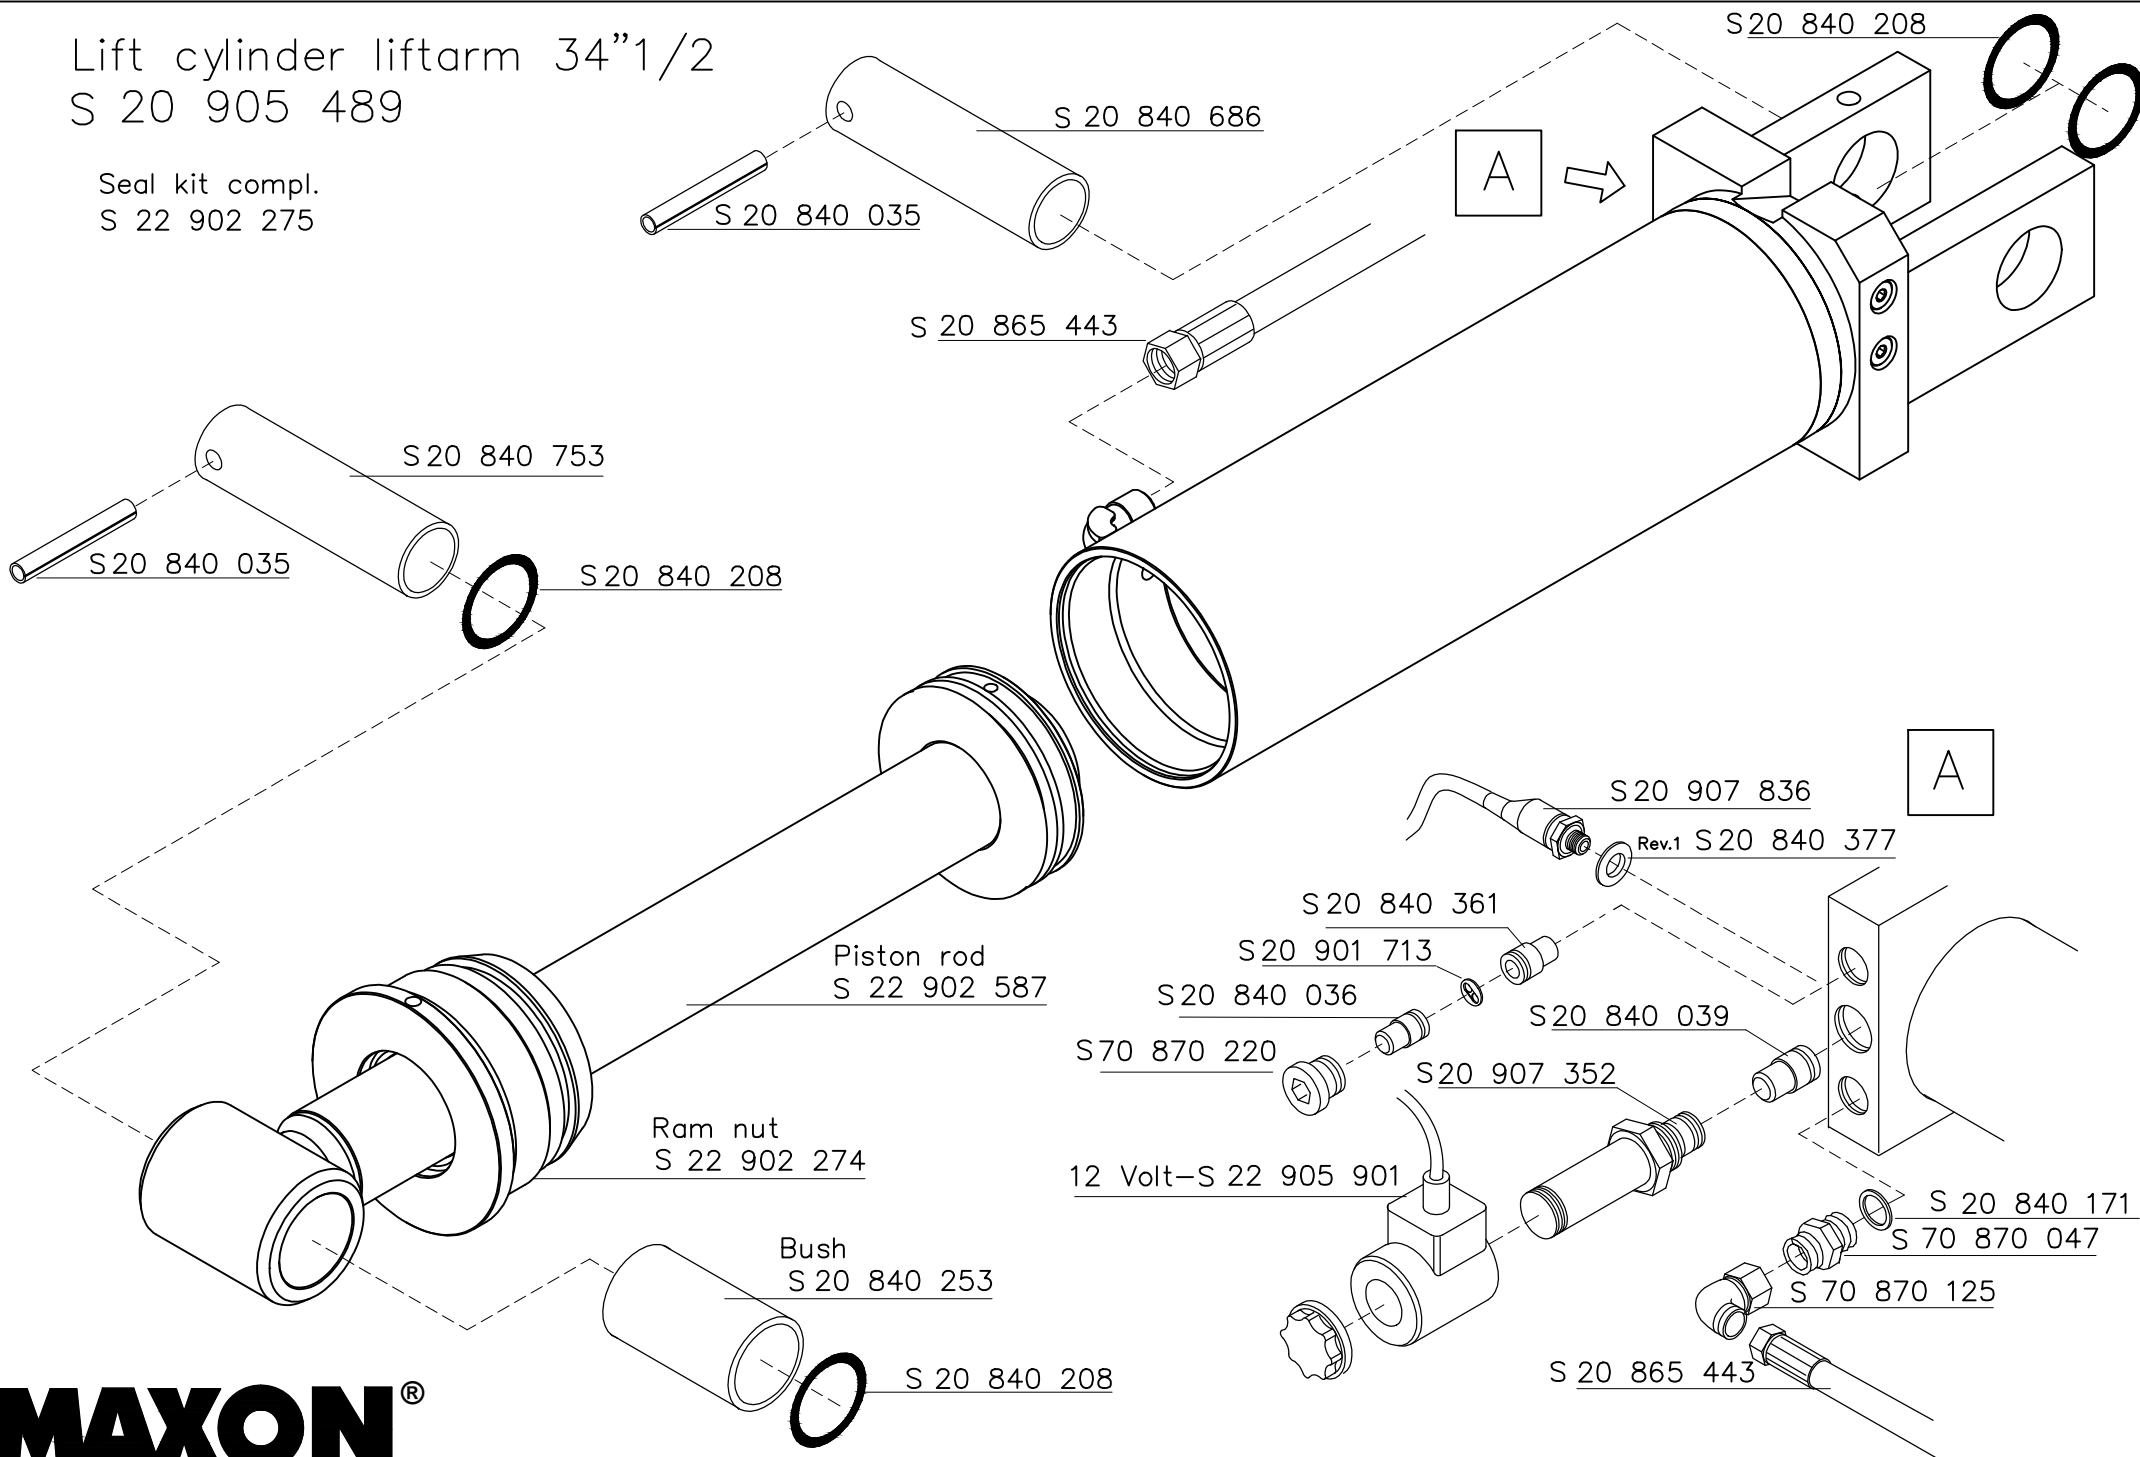

**MAXON®**

GPST 44 X1

# Powerpack 12Volt

S 20 909 760

## Hydraulic oil - recommendations

### OIL SPECIFICATIONS

Grade ISO - (32)

Gravity, API - 29.5 Degrees

Pour Point, F - (-54 Degrees)


### VISCOSITY

@ 40 Degrees C - 31.2 cSt

@ 100 Degrees C - 6.2 cSt

VISCOSITY INDEX - 154 VI

Flash Point, F - 325 Degrees

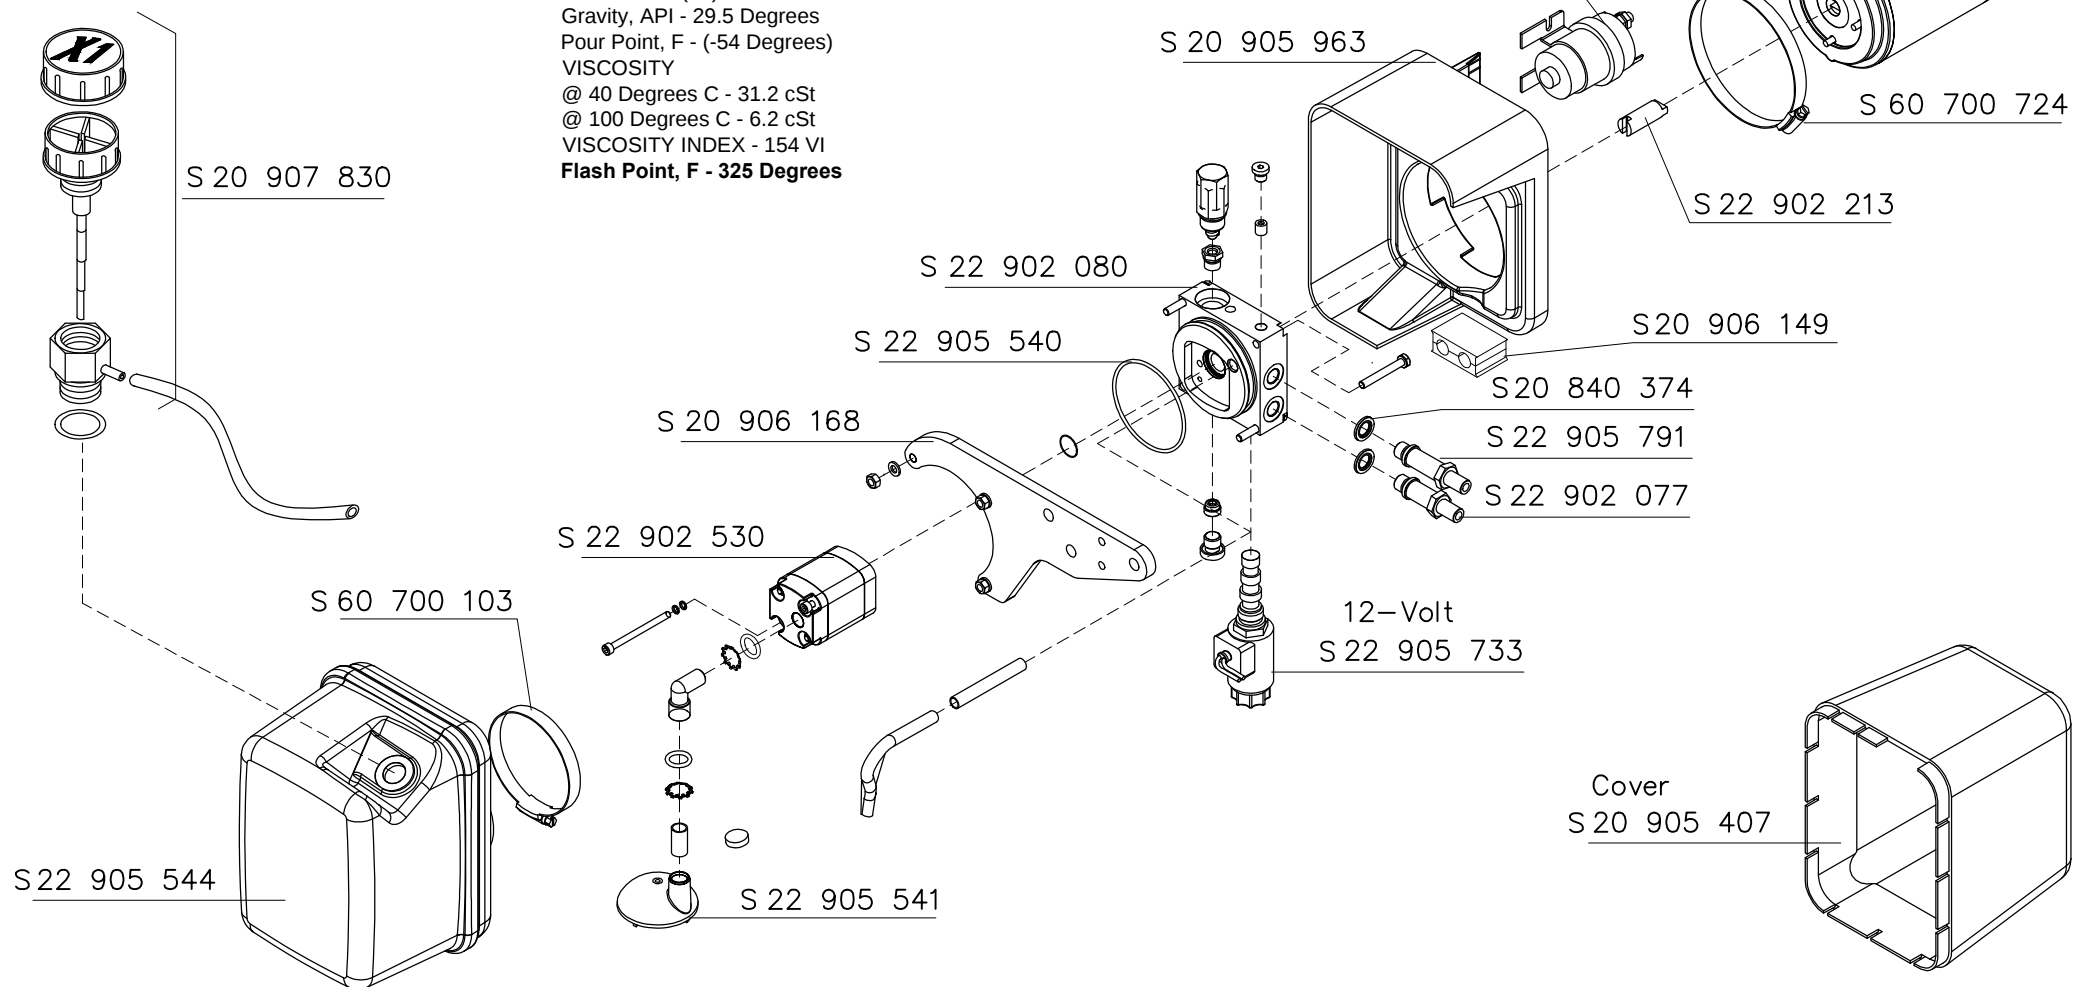

Platform  
S 42 220 104

S 20 852 376  
S 20 853 463  
S 20 840 508

S 20 851 223  
S 20 906 162  
S 20 906 160  
S 20 906 147

S 20 901 222

S 20 868 706 spring tilt down  
S 20 868 707 spring tilt up  
S 20 905 770

S 20 906 186

S 20 906 142

S 20 902 429  
A S 80 000 062

S 20 909 471 C

Steel

S 20 906 135

**ATTENTION  
BY SLIDING!**

Parallel to the slidetram

No contact between  
slide frame and platform

Contact

Slide frame  
overload set

S 20 907 995

**MAXON®**

No. 20 907 995

S 20 840 504

S 20 901 436

S 20 852 376

S 20 853 463

S 20 905 142

S 20 900 810

S 20 905 254

S 20 906 196

S 80 000 006

to Control-Unit

cable-set standard  
with flash-light  
and with food-control  
S 20 910 362

cable-set without flash-light  
and without food-control  
S 20 910 363

S 22 905 568

S 20 906 056

S 80 000 084

S 20 909 470

S 10 830 406  
S 22 905 617

S 20 906 141

**MAXON®**  
GPST 44 X1

Platform  
42 220 104

S 20 852 376

S 20 853 463

S 20 840 508

S 20 851 223

S 20 906 162

S 20 906 160

S 20 906 147

S 20 901 222

S 20 868 706 spring tilt down

S 20 868 707 spring tilt up

S 20 905 770

S 20 906 135

Steel

**ATTENTION  
BY SLIDING!**

Parallel to the slide frame

No contact between  
slide frame and platform

Contact

Slide frame  
overloaded

**MAXON®**

No. 20 007 000

S 20 907 995

S 20 840 504

S 20 901 436

S 20 852 376

S 20 853 463

S 20 905 142

S 20 900 810

S 20 906 186

S 20 906 142

S 20 902 429

A S 80 000 062

S 20 909 471

S 20 906 136

S 20 905 254

S 20 906 196

S 80 000 006

S 22 905 568

S 20 906 056

S 80 000 084

cable compiled  
S 20 907 262

S 20 852 373

S 90 890 011

S 00 810 840

only the mercury switch

S 20 903 572

only the mercury switch

S 20 906 141


S 20 909 470

S 10 830 406

**MAXON®**

GPST 44 X1

# Footcontrol

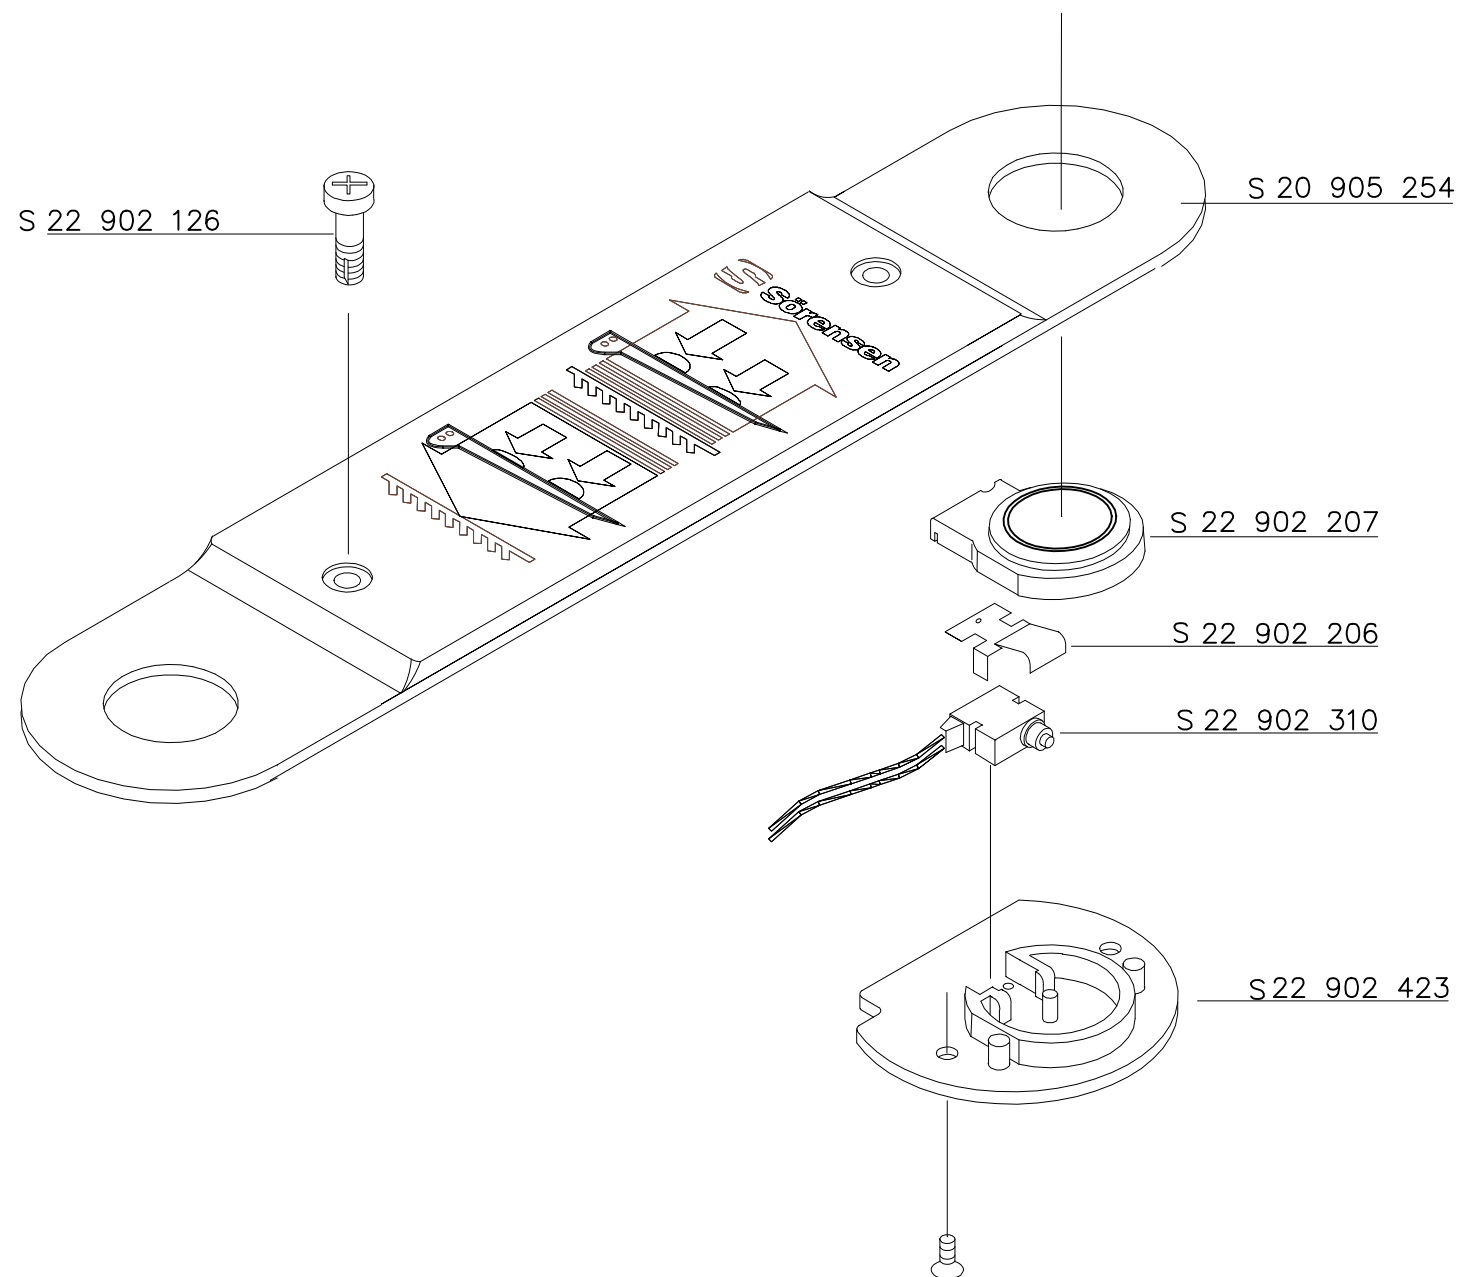

# GPST 44 platform cable-set Series 10

LED-warning-flashing-light  
red  
S 20 909 471

cable-set standard  
with flash-light  
and with foot-control  
S 20 910 362

cable-set without flash-light  
and without foot-control  
S 20 910 363

to Control-Unit

sensor S2 switch

flextube

blue  
brown

blue  
brown

Foot-control  
S 20 905 254

Foot-control and LED-warning-flashing-light  
is not included in the cable-set  
S 20 910 362 and S 20 910 363

LED-warning-flashing-light  
blue  
S 20 909 470

# MAXON®


## GPST 44 X1

Sachnummer 20 909 841  
Series 10, from lift-no. 84 633  
Version 20.08.2013








Document no.: 20 909 841  
Series 10, from lift.-no. 84 633  
Version 20.08.2013

# Handcontrol 20 460 351

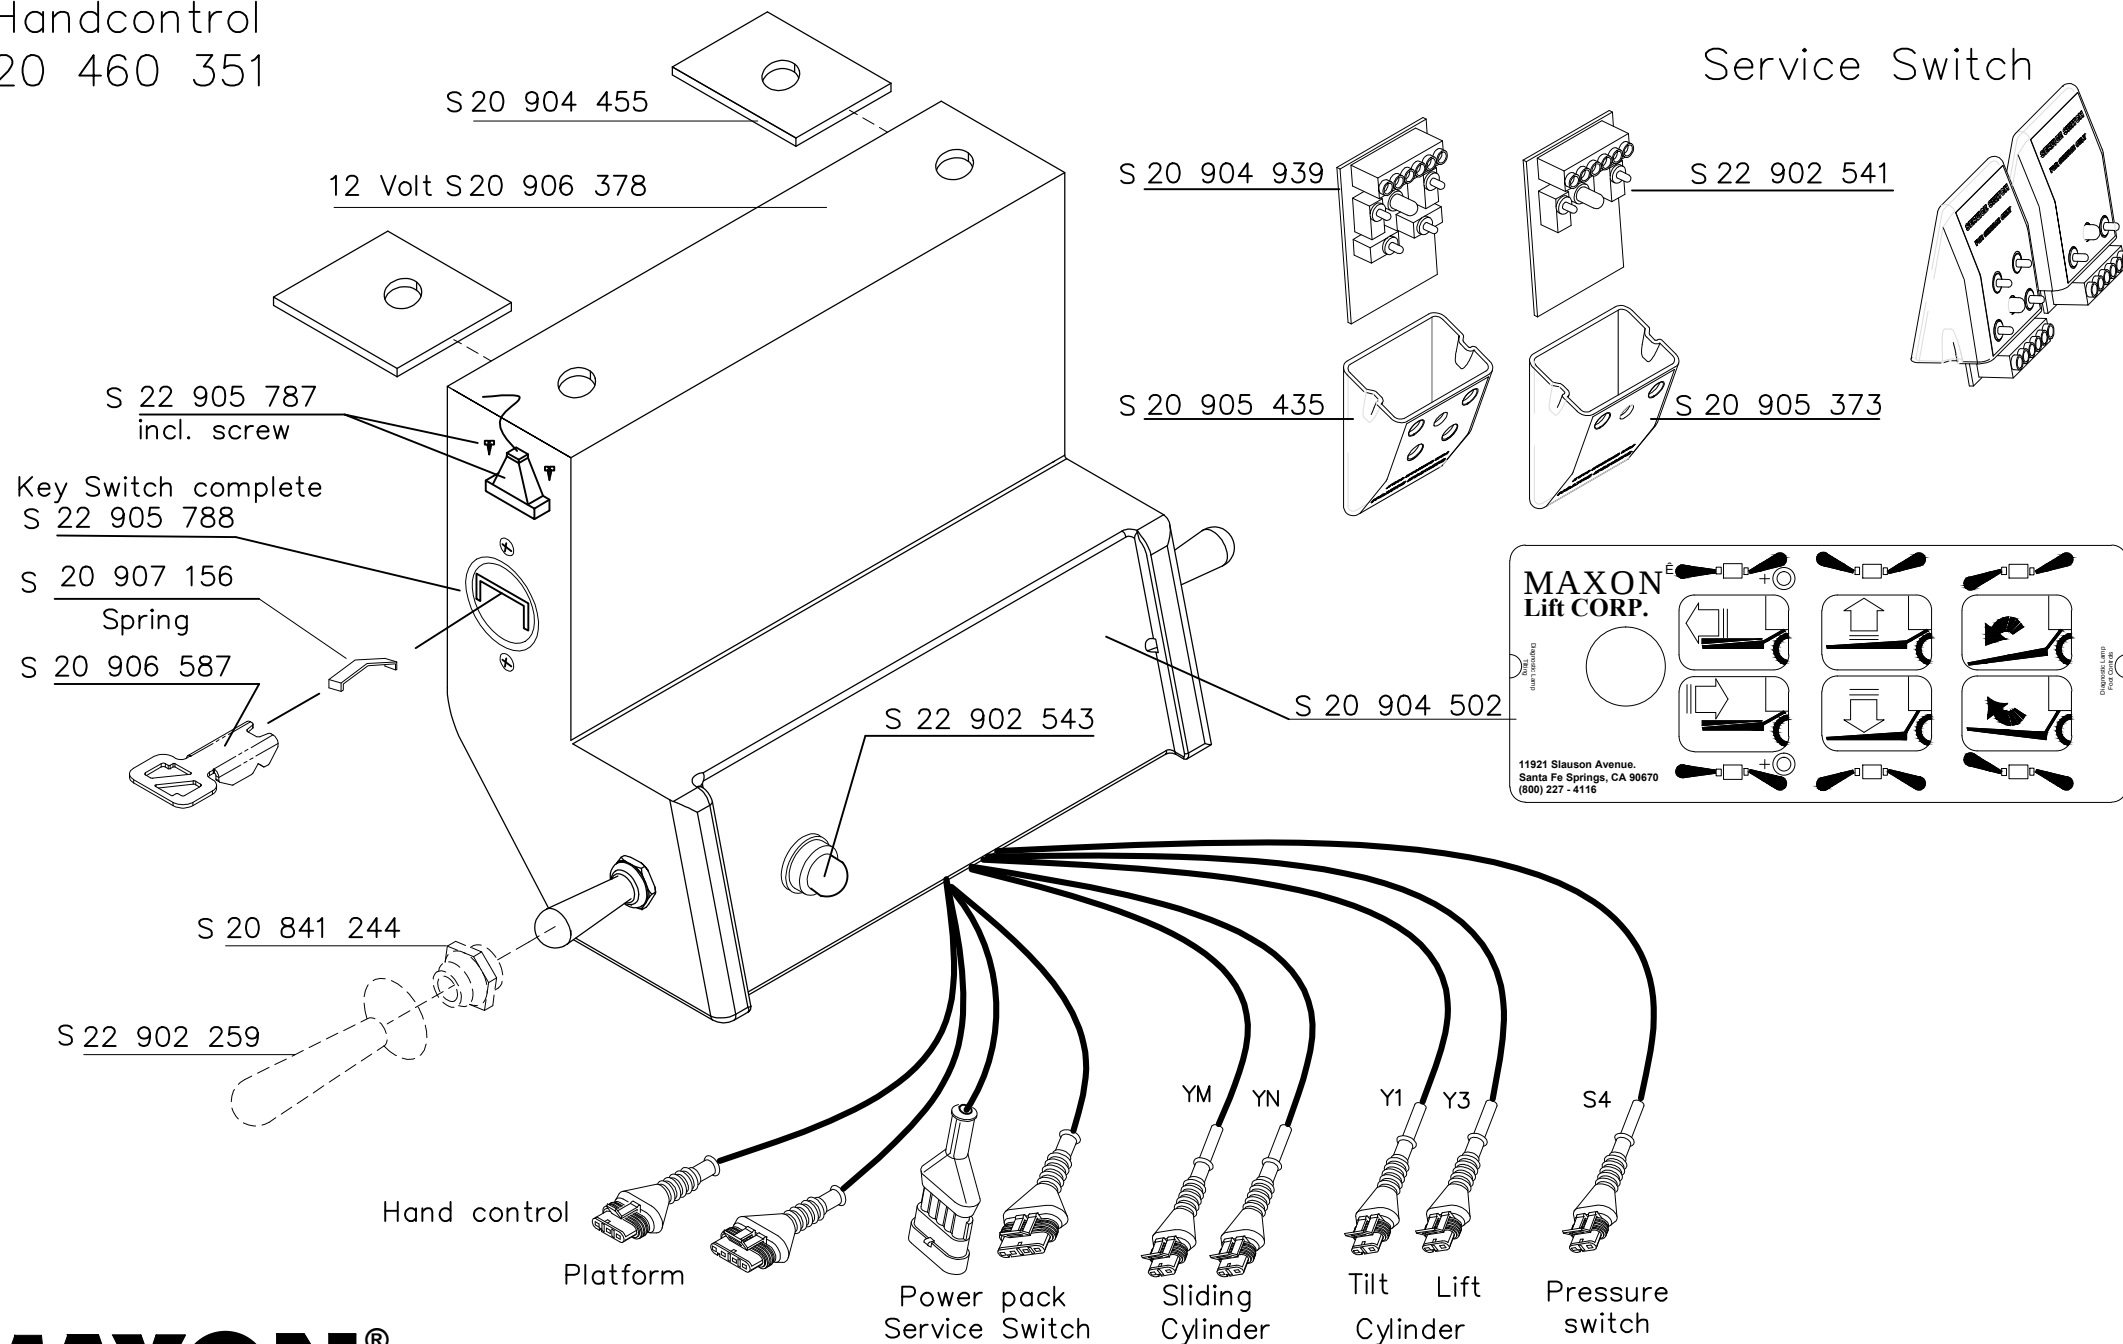


# Hand held control

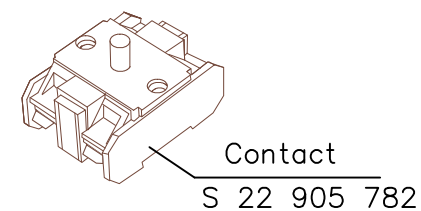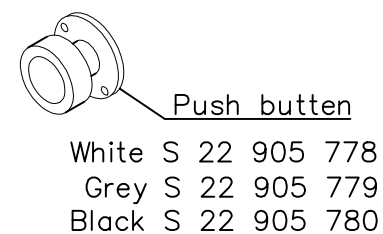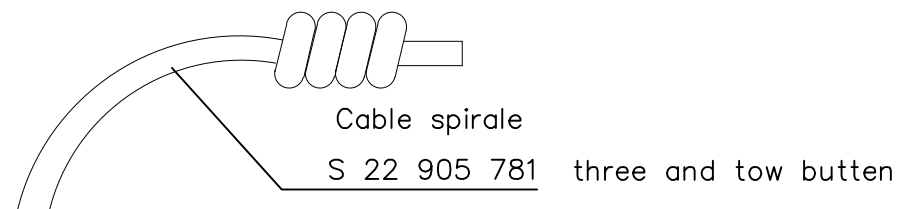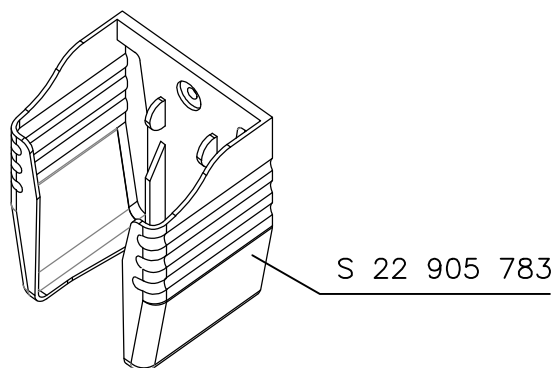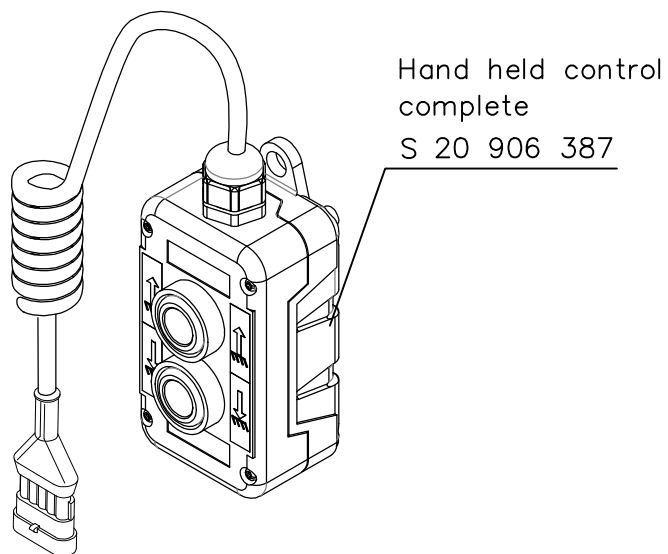

# Hydraulicfitting

Tube kit compl. S 20 907 773

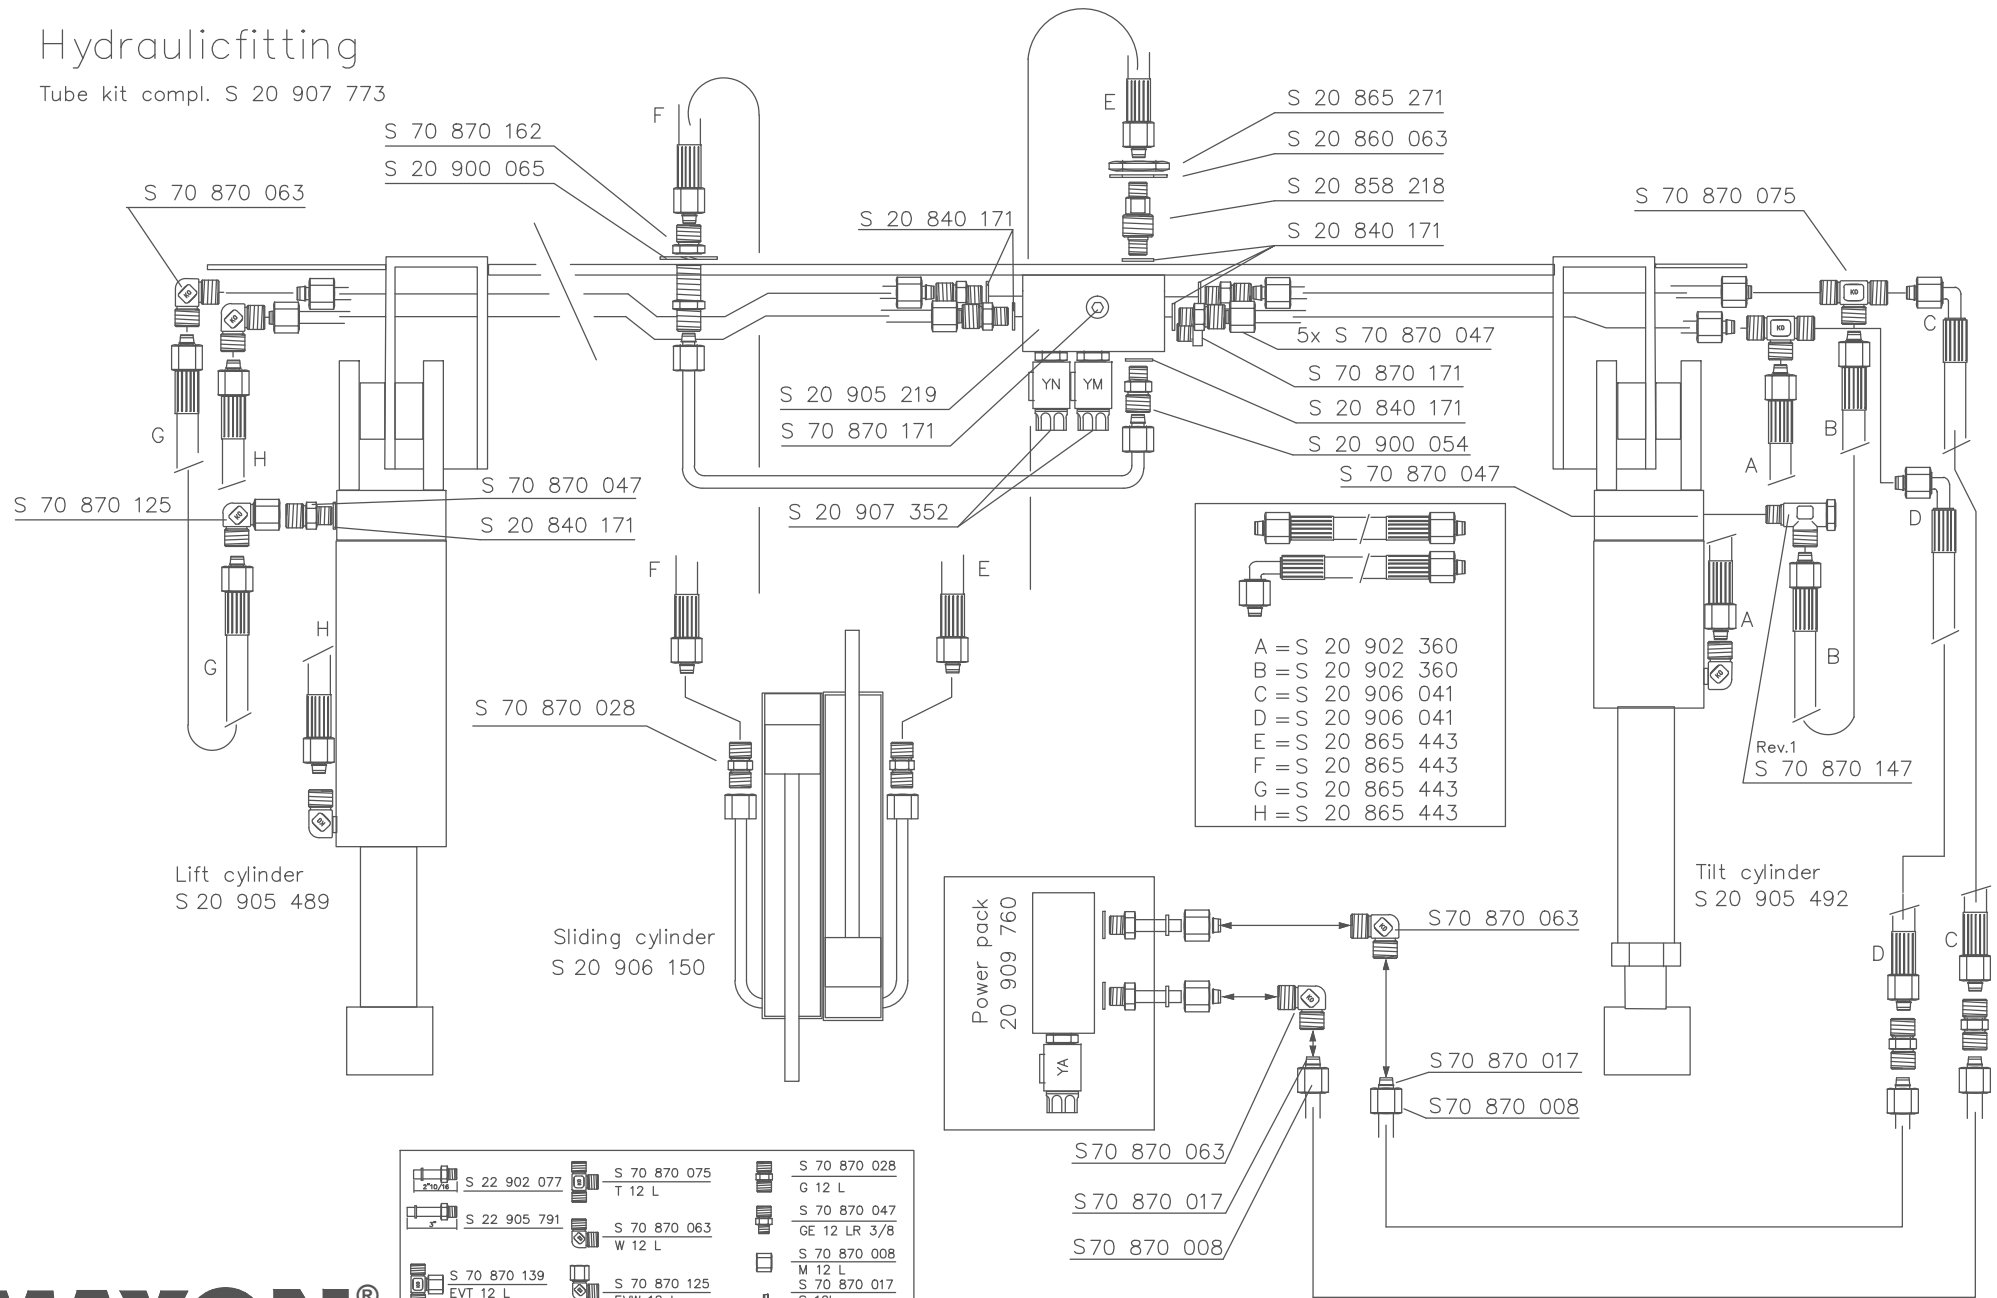

**MAXON**<sup>®</sup>  
GPST 44 X1