



MAXON®

Spare Parts Catalogue GPC 44 X-4

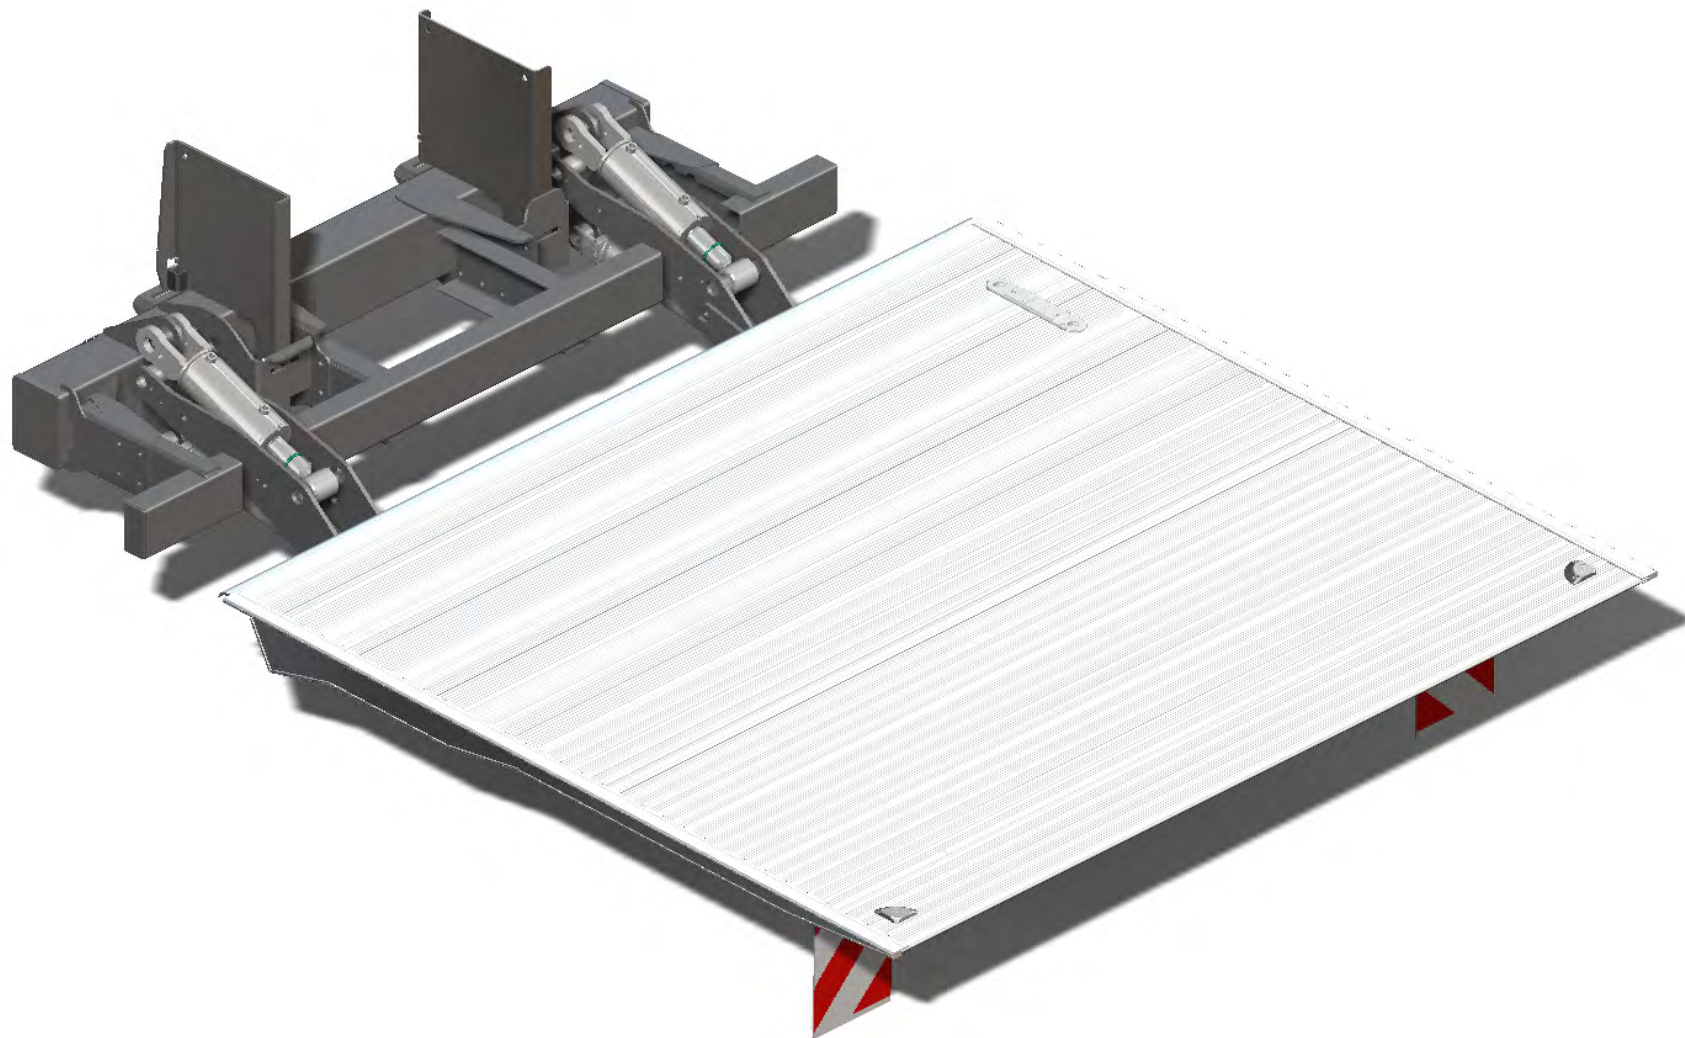

Document no.: S 20 912 634
Version 12.2021

Lifting mechanism

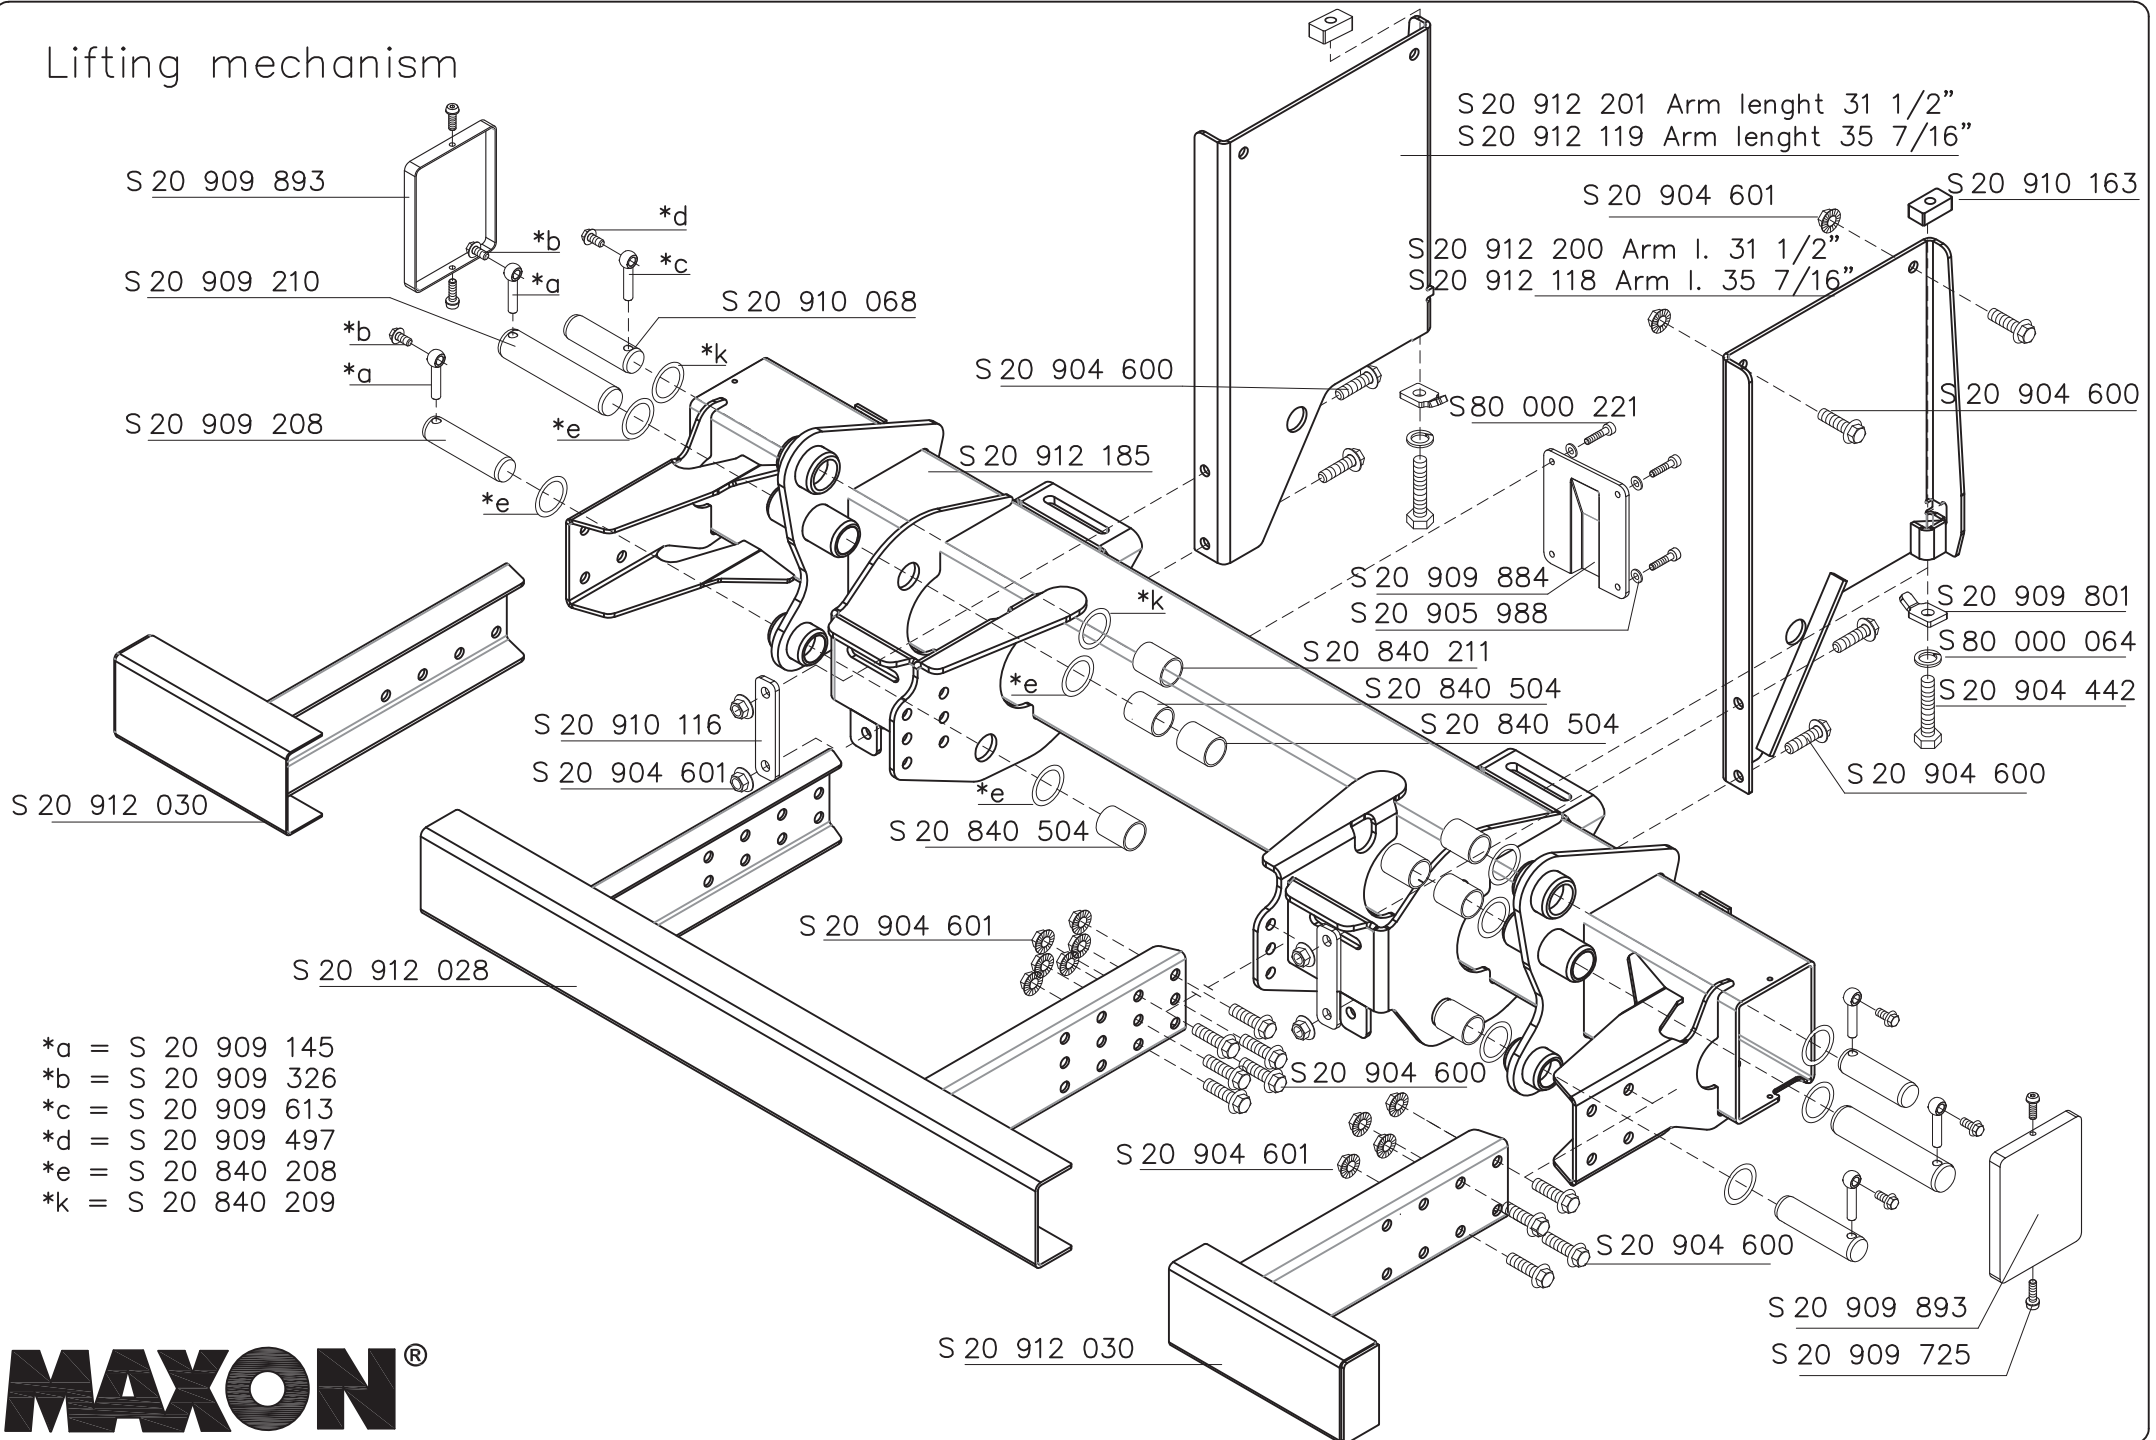

MAXON®

GPC 44 X-4

Document no.: 20 912 634
Version 09.2021


Lifting mechanism

*a = S 20 909 145
 *b = S 20 909 325
 *c = S 20 909 613
 *d = S 80 000 029
 *e = S 20 840 208
 *f = S 20 910 060 for 31 $\frac{1}{2}$ " and 35 $\frac{7}{16}$ "
 *h = S 20 909 324

**kompletely lifting mechanism


lifting mechanism 31 $\frac{1}{2}$ " (800mm):
right side + left side S 20 910 056

lifting mechanism 35 $\frac{7}{16}$ " (900mm):
right side + left side S 20 910 165

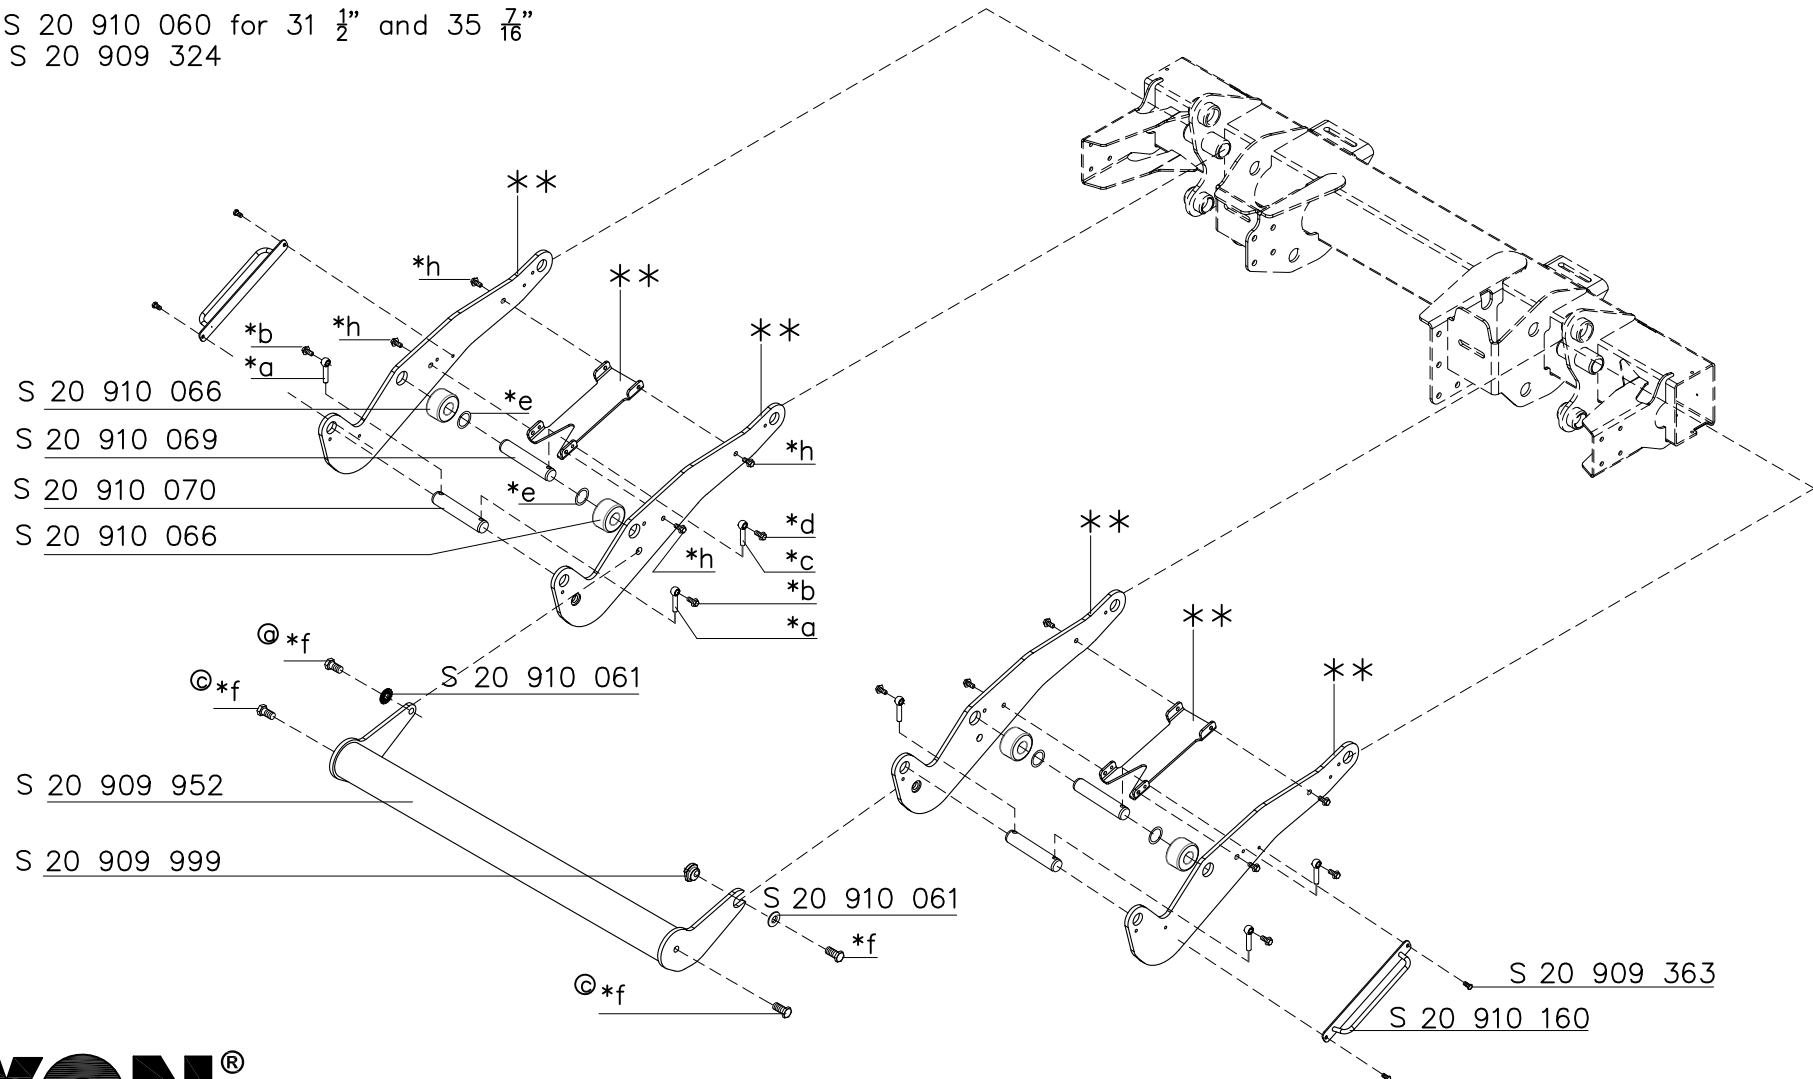

Lifting cylinder left side

Lifting cylinder right and left side compl. S 20 467 330

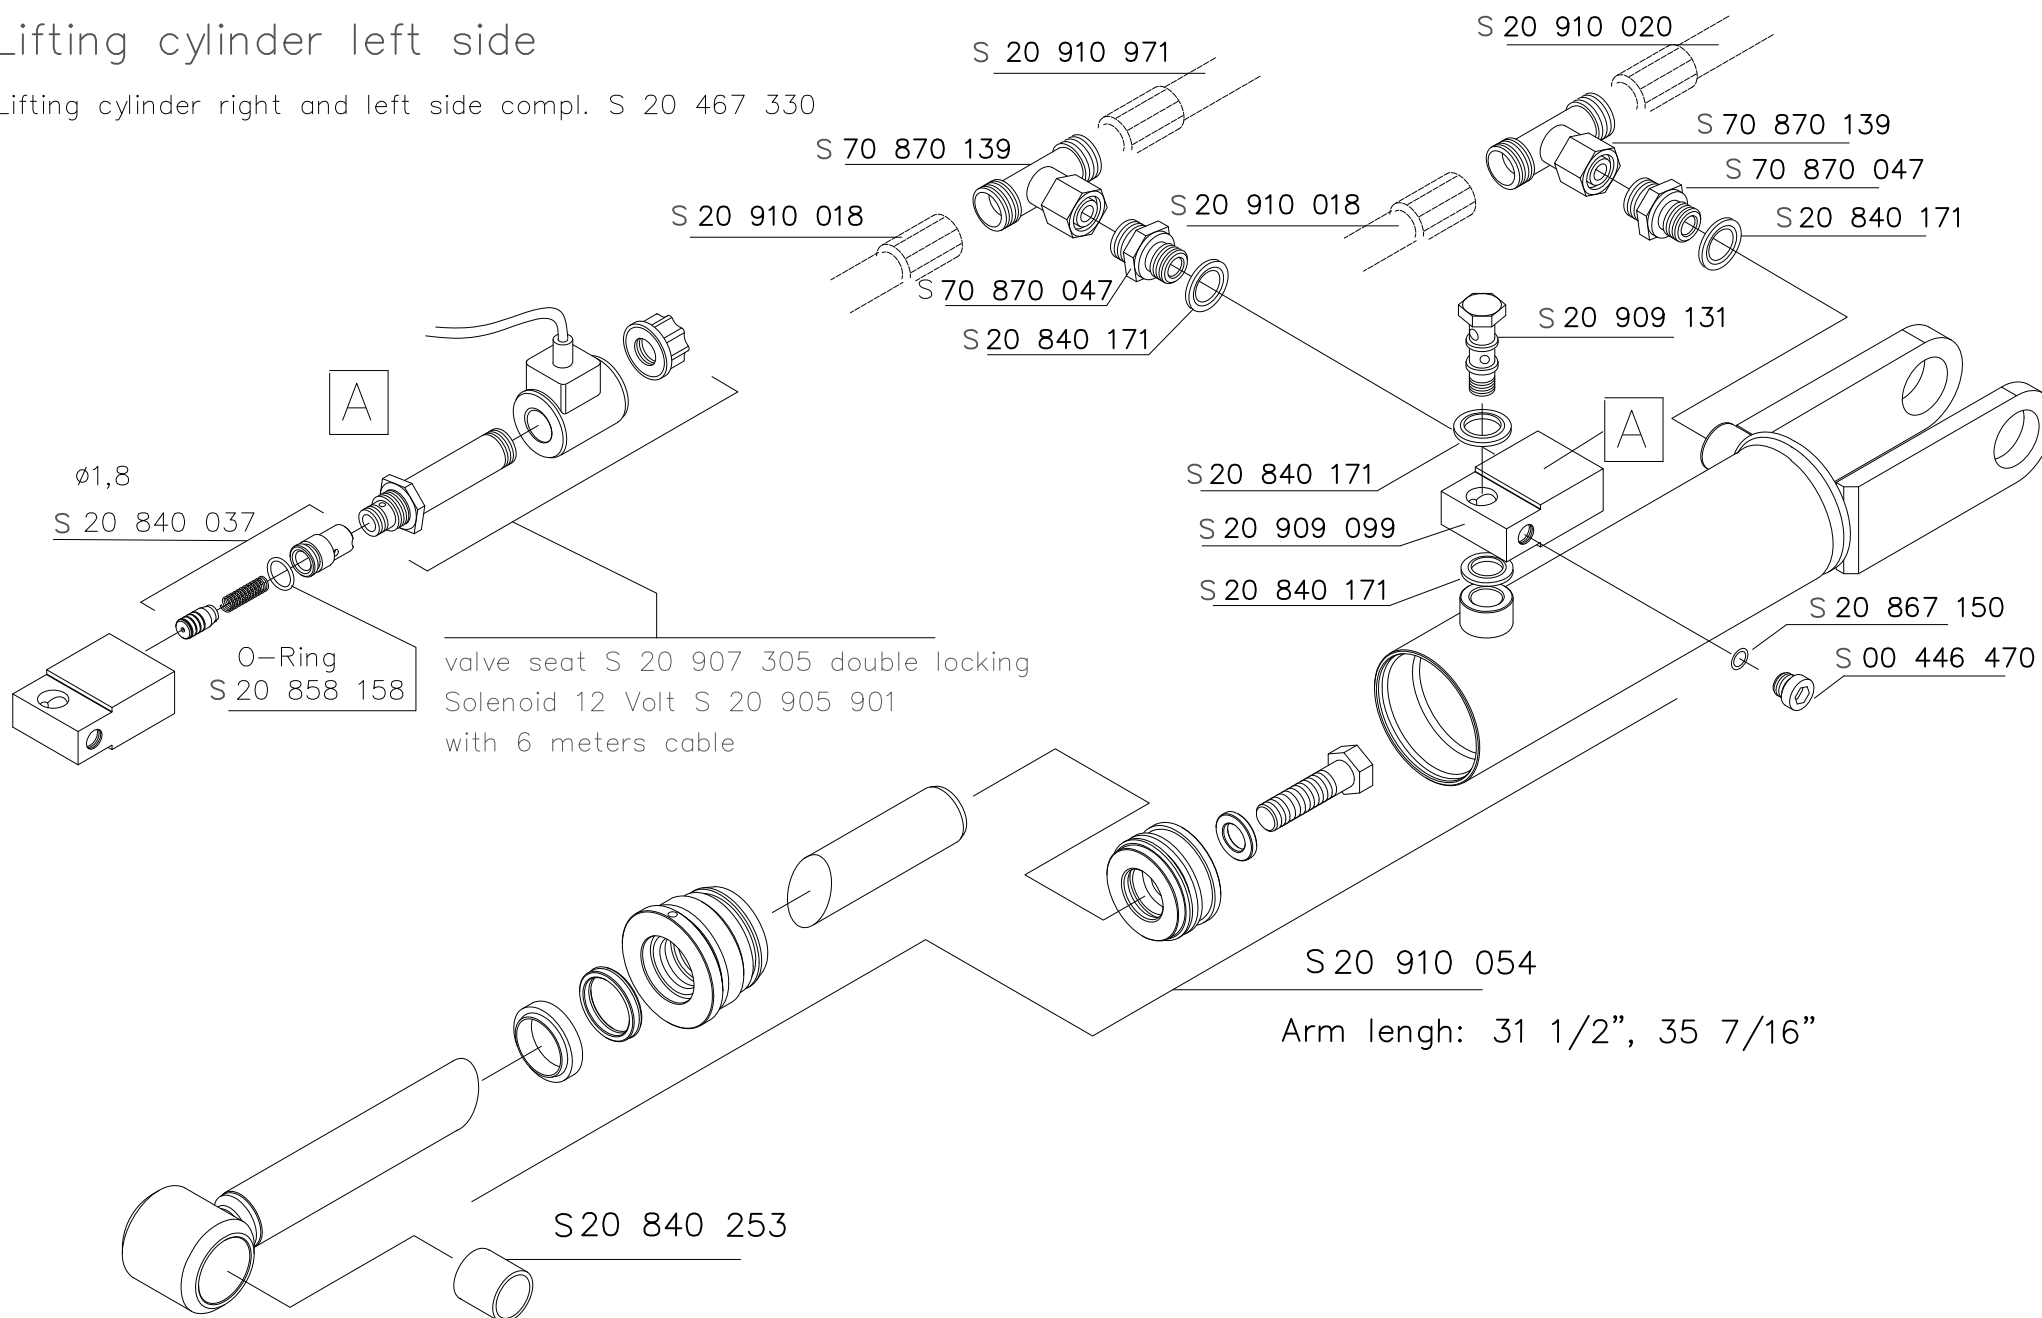


MAXON®

GPC 44 X-4

Lifting cylinder right side

Lifting cylinder right, left side compl. S 20 467 330

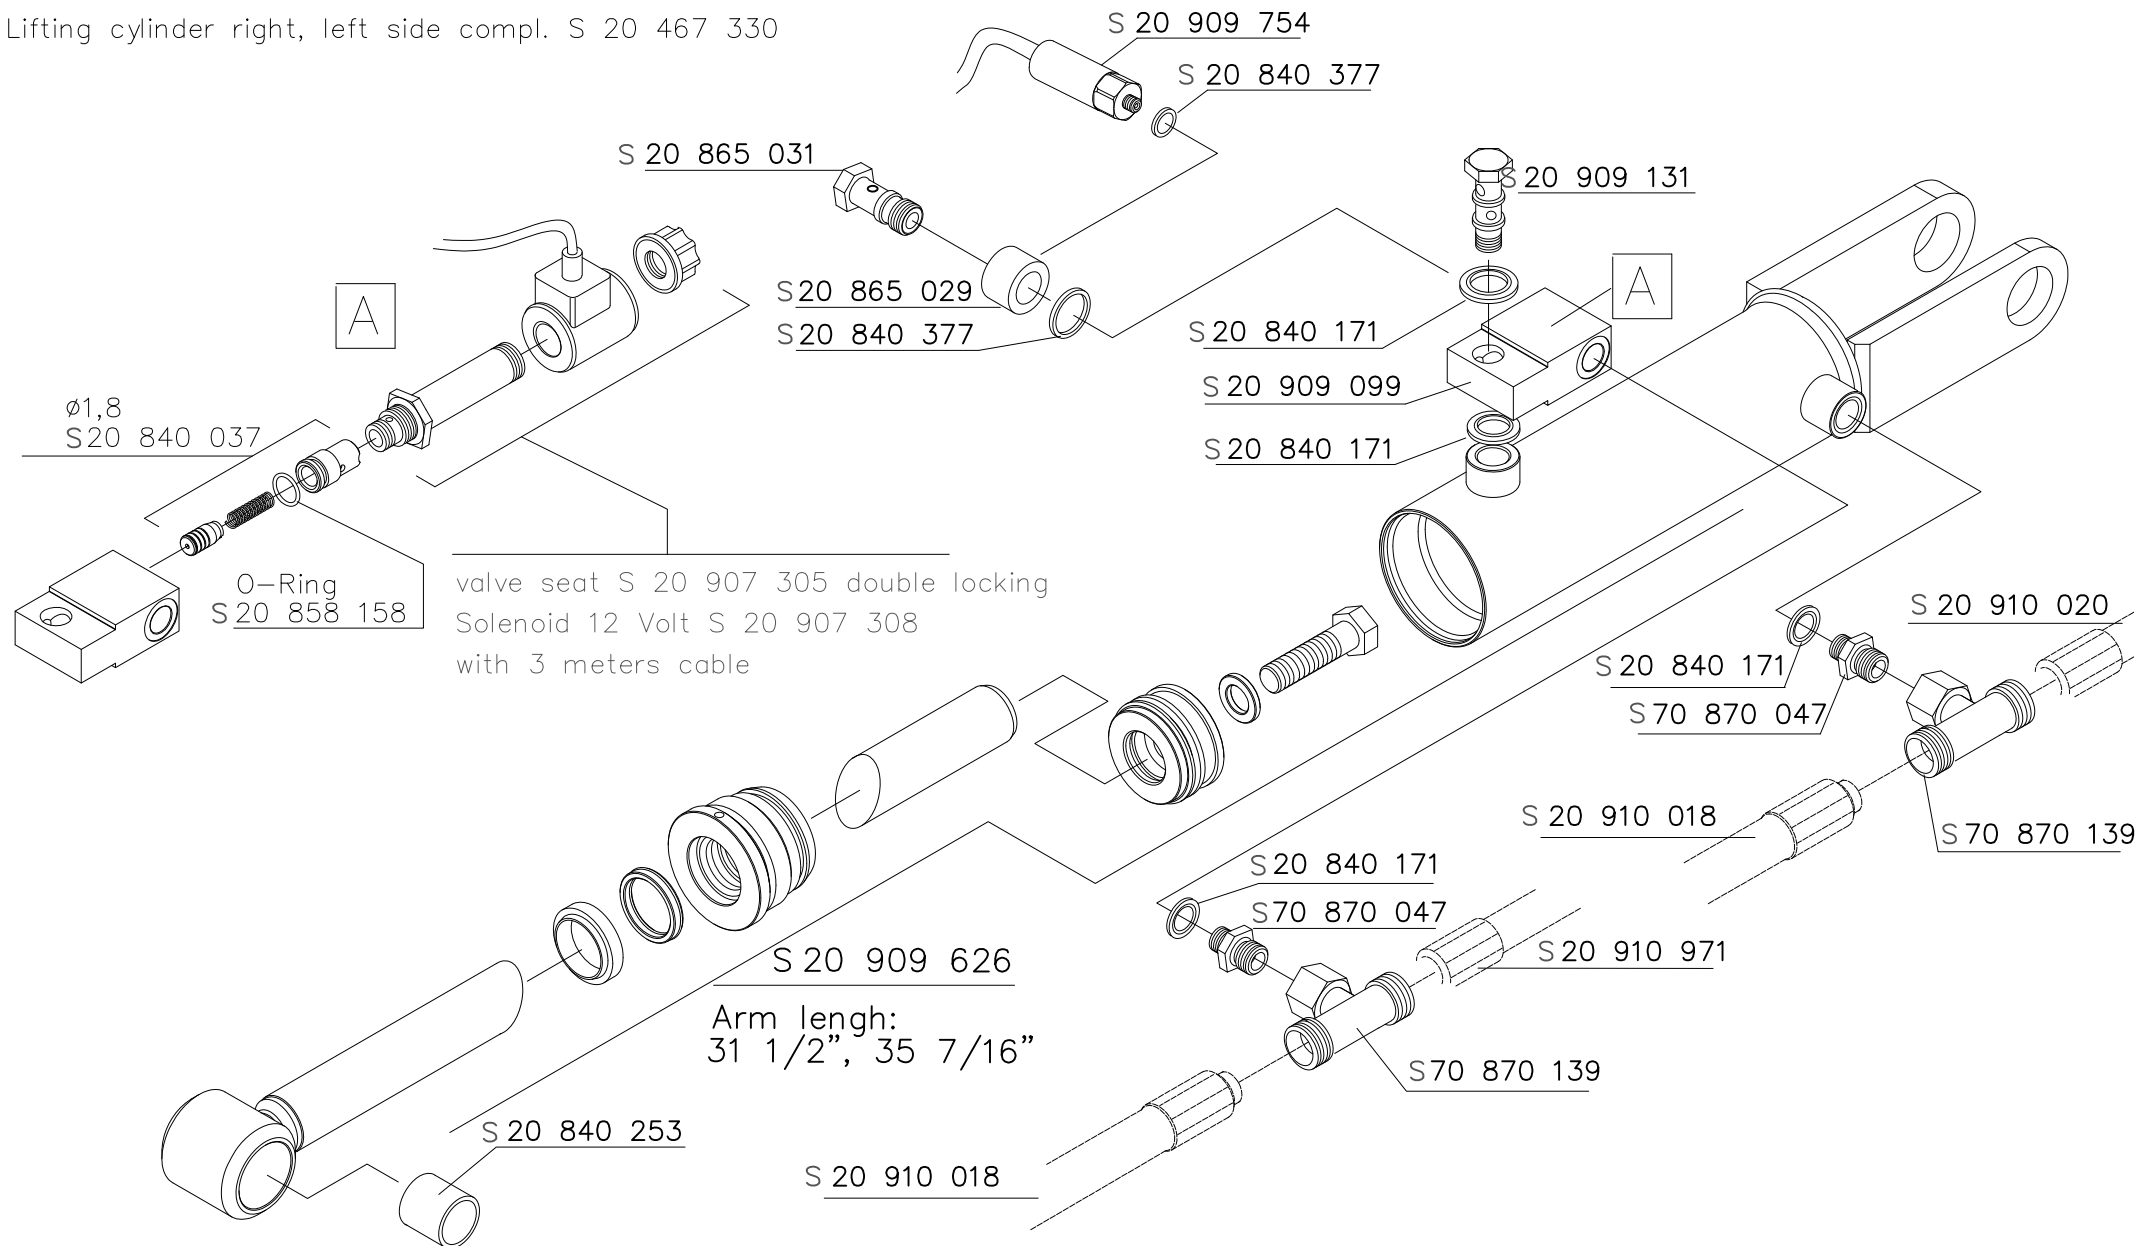

MAXON®

GPC 44 X-4

Document no.: 20 912 634
Version 09.2021

Tilting Cylinder left side

Arm length 31 1/2":

Tilting cylinder right, left compl. S 20 467 340

Arm length 35 7/16":

Tilting cylinder right, left compl. S 20 467 341

valve seat S 20 907 305 double locking

Solenoid 12 Volt S 20 905 901

with 6 meters cable

S 20 910 018

Seal kit

S 20 909 710

S 20 840 208

S 20 840 366

Arm length:

31 1/2": S 20 909 704

35 7/16": S 20 909 703

S 20 840 366

S 20 840 208

S 20 909 131

S 20 840 374

S 70 870 118

S 20 840 171

S 20 909 126

S 20 860 715

S 20 840 171

S 20 905 753

S 20 905 924

S 20 905 924

S 20 909 132

S 70 870 008

S 70 870 017

S 70 870 075

S 20 910 018

ø2,8 S 20 840 362

S 20 905 924

S 20 905 754

S 20 901 713

ø2,0 S 20 840 036

ø1,3 S 20 840 359

Arm length:

31 1/2", 35 7/16"

S 20 909 627

MAXON®

GPC 44 X-4

Document no.: 20 912 634
Version 09.2021


Tilting Cylinder right side

Arm length 31 1/2":

Tilting cylinder right, left compl. S 20 467 340

Arm length 35 7/16":

Tilting cylinder right, left compl. S 20 467 341

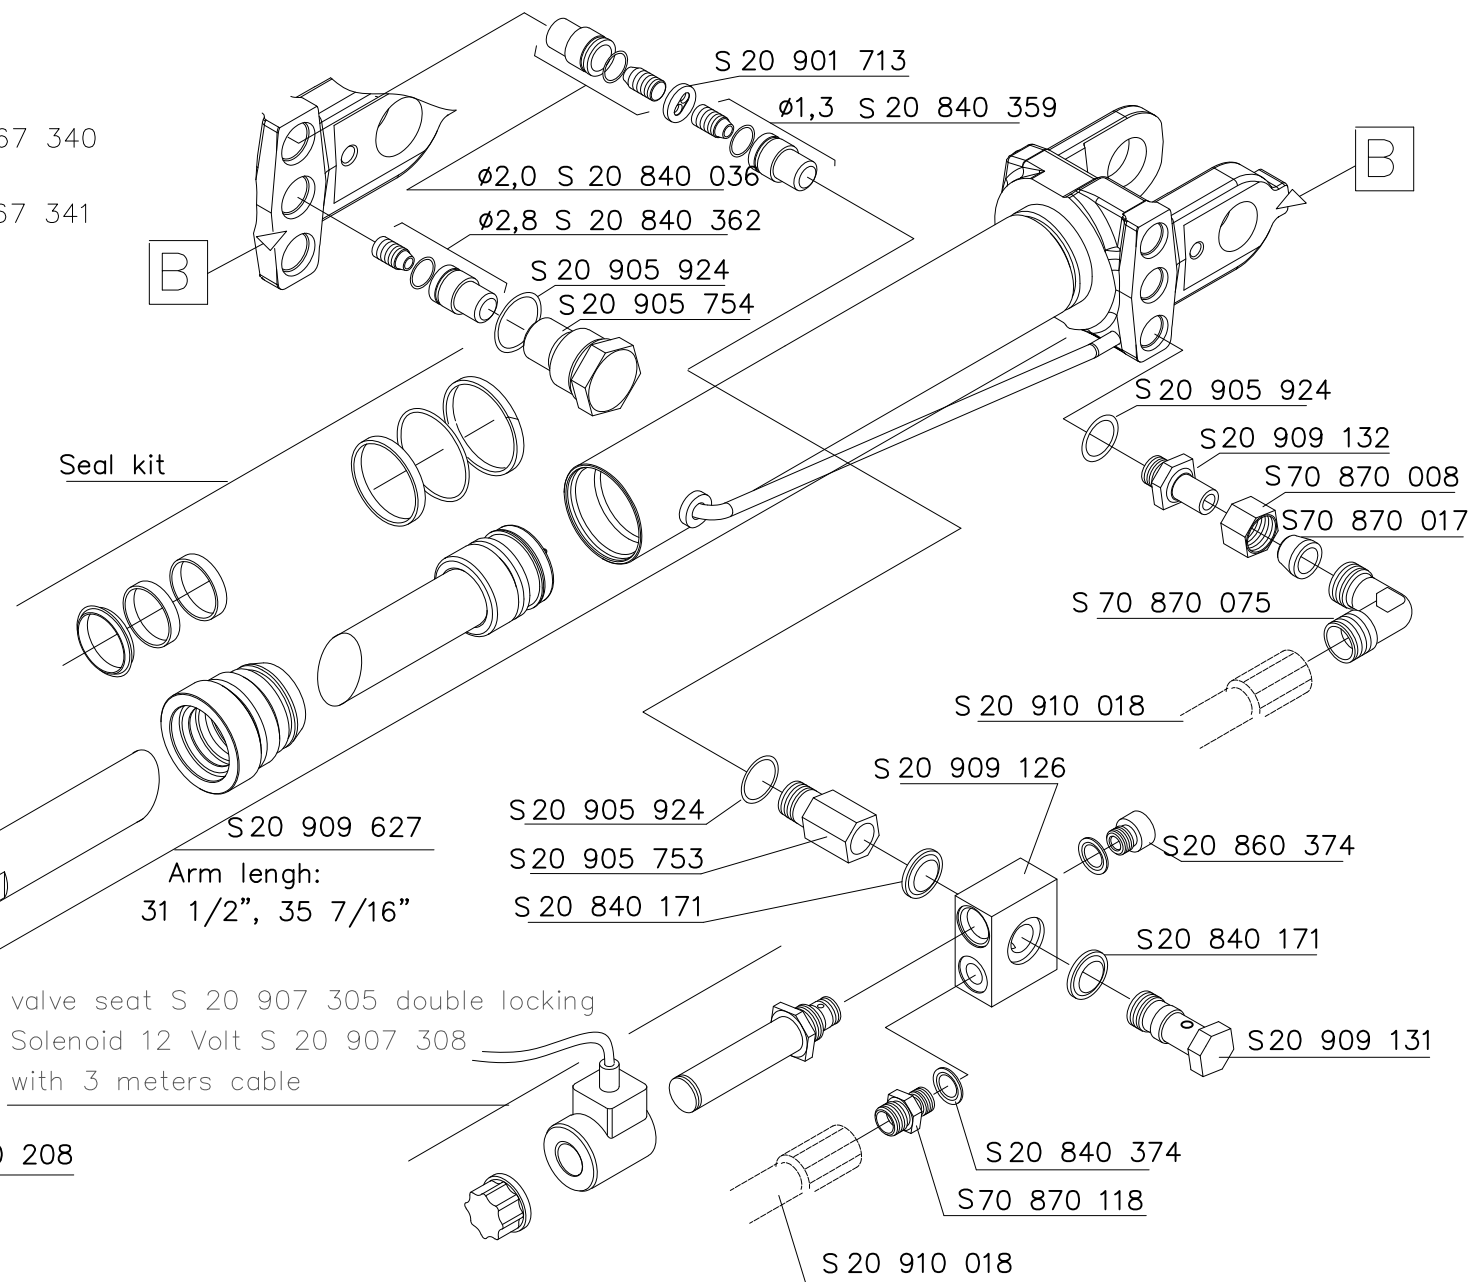


MAXON®

GPC 44 X-4


Document no.: 20 912 634
Version 09.2021

Power pack 12V S 20 912 305

Power wire 50 qmm / S 20 909 546
Power wire 50 qmm incl. fuse / S 20 909 545

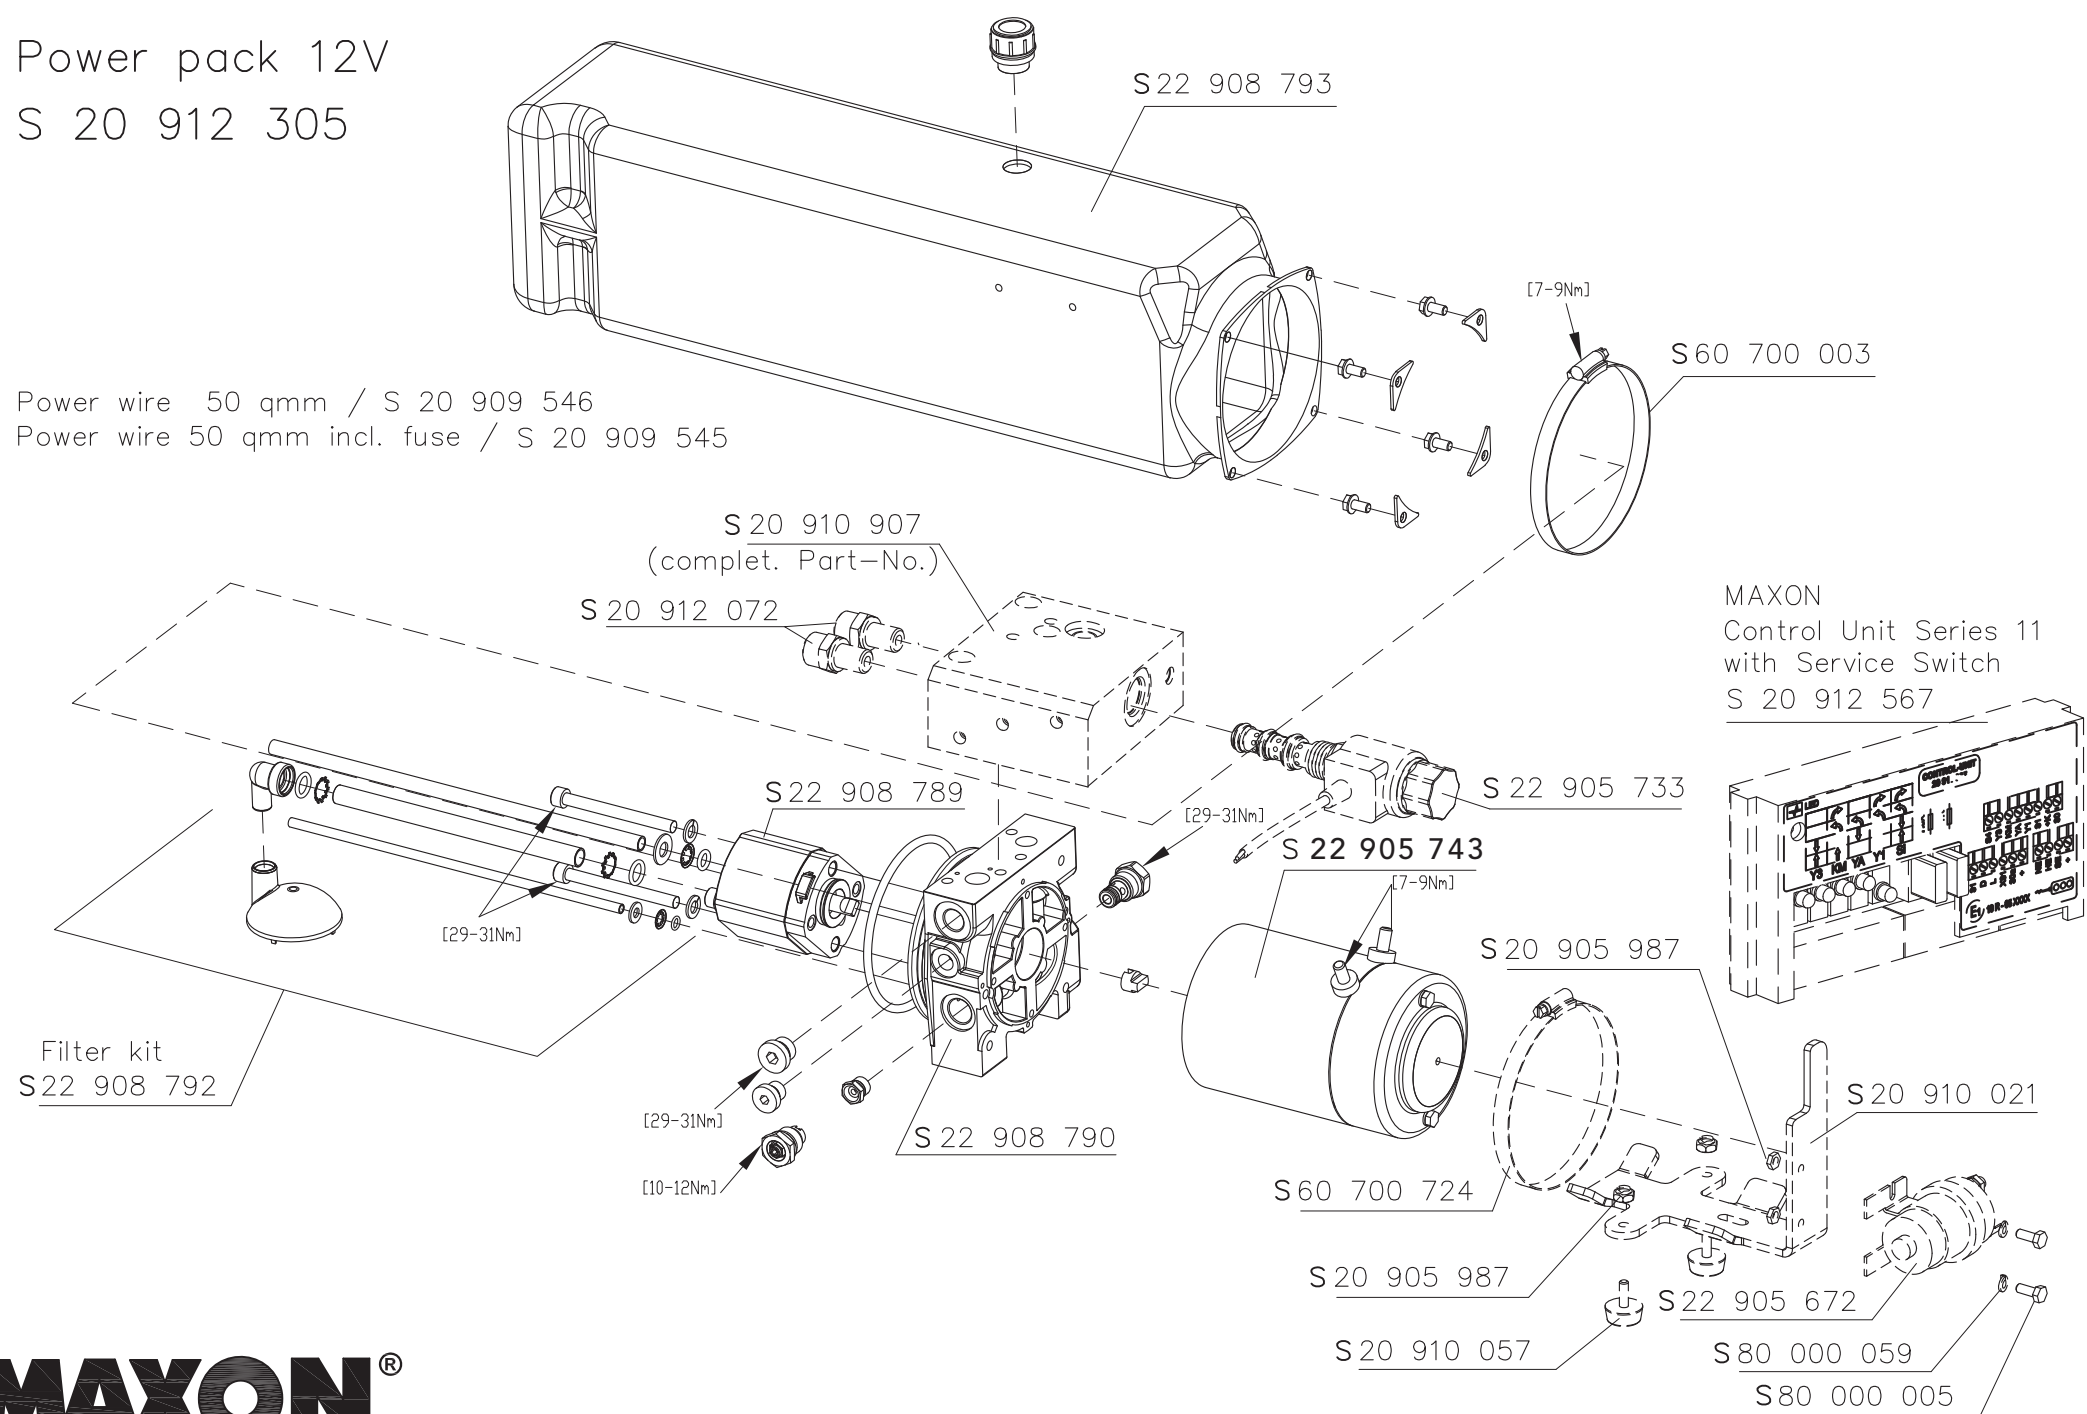


Powerpack 12V, Series 13
S 20 913 004

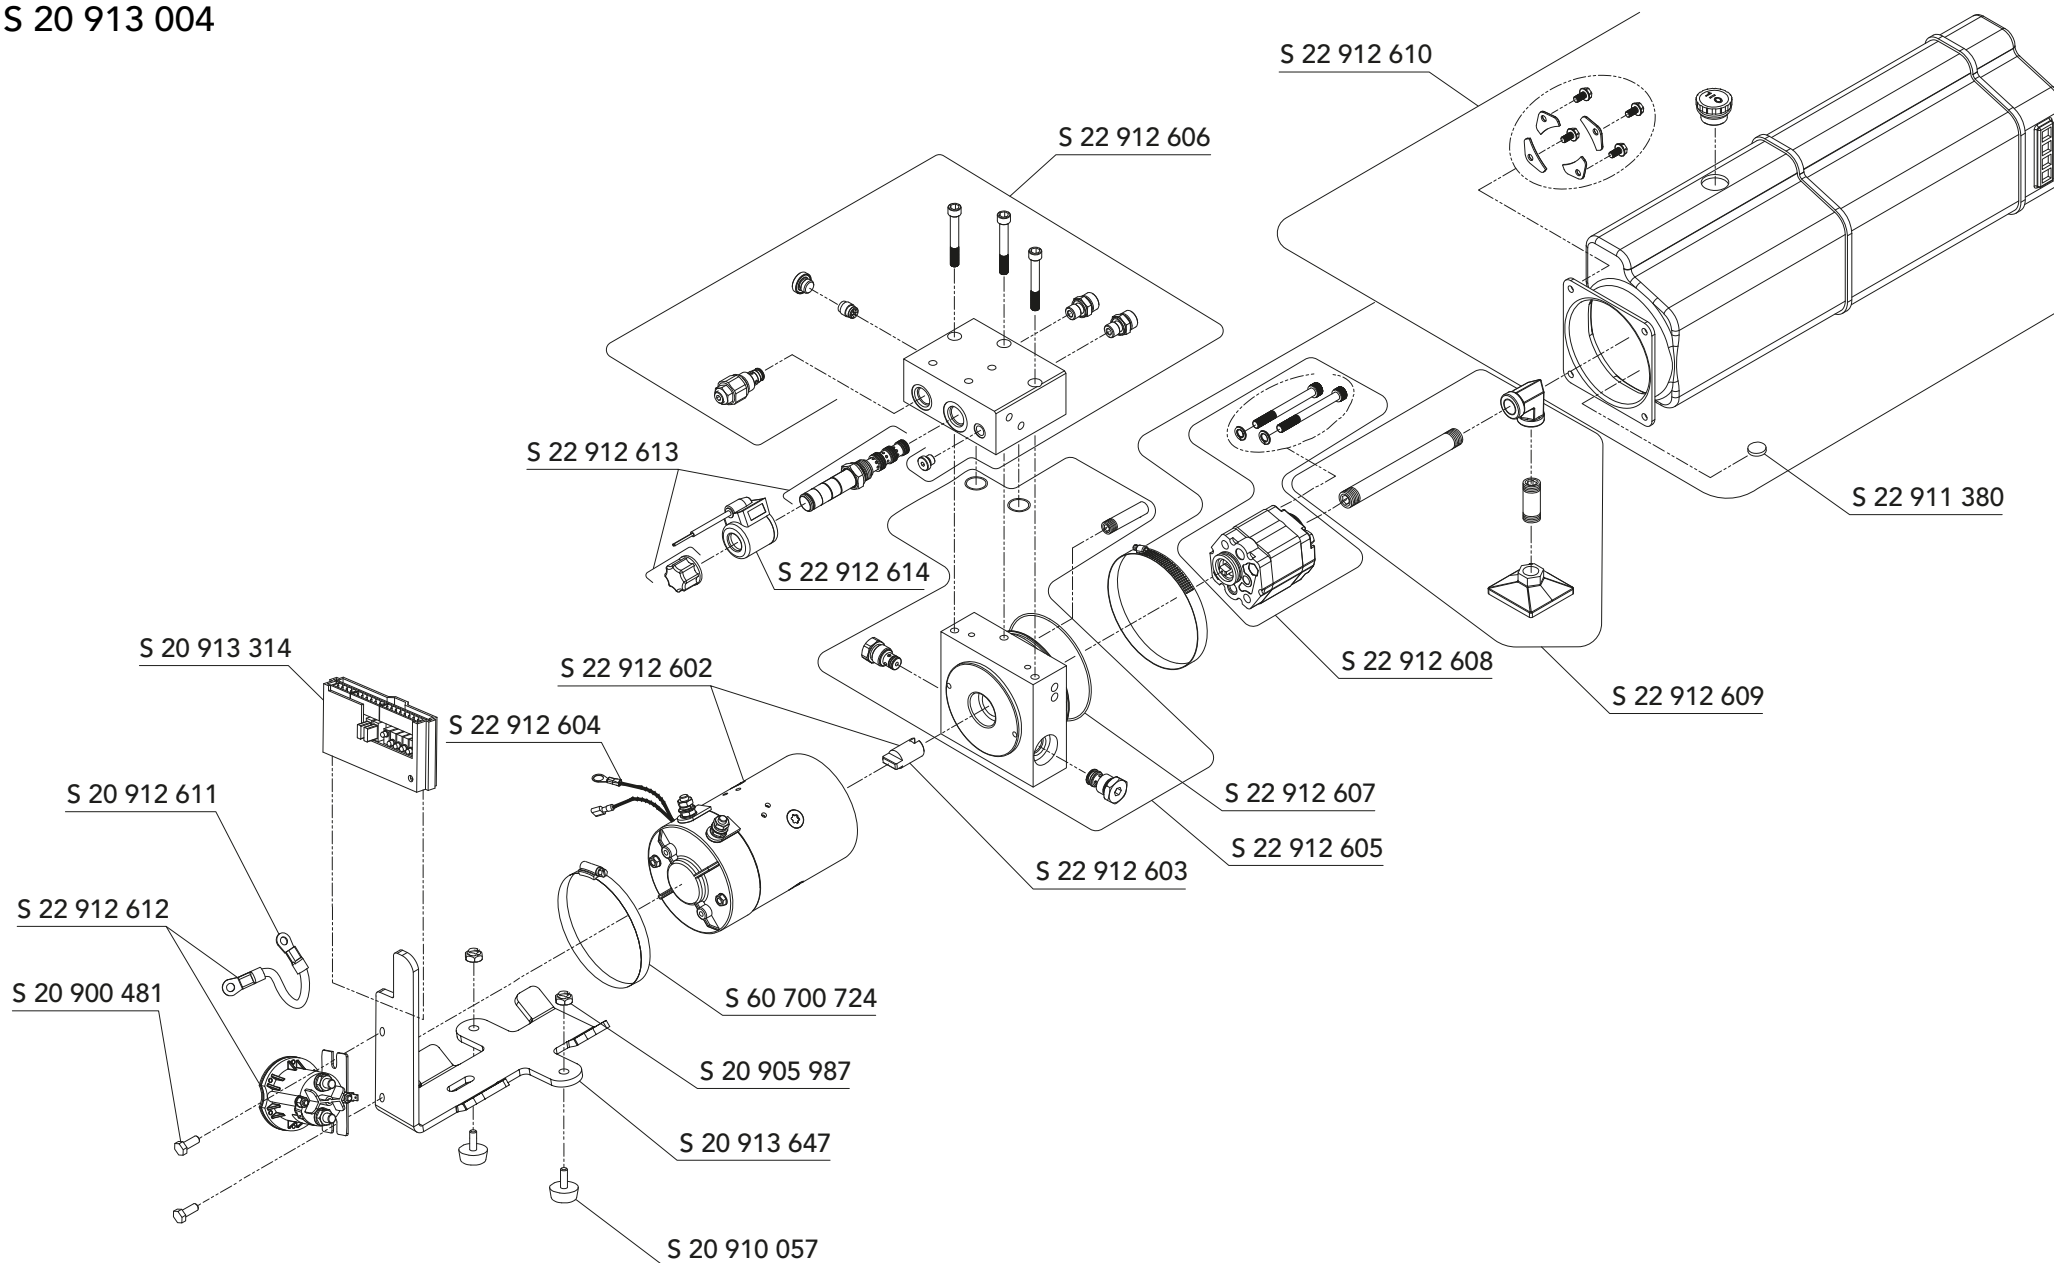

MAXON®


Valve body in power pack

valve body S 20 909 925 in power pack, completely part.-no.: S 20 910 907

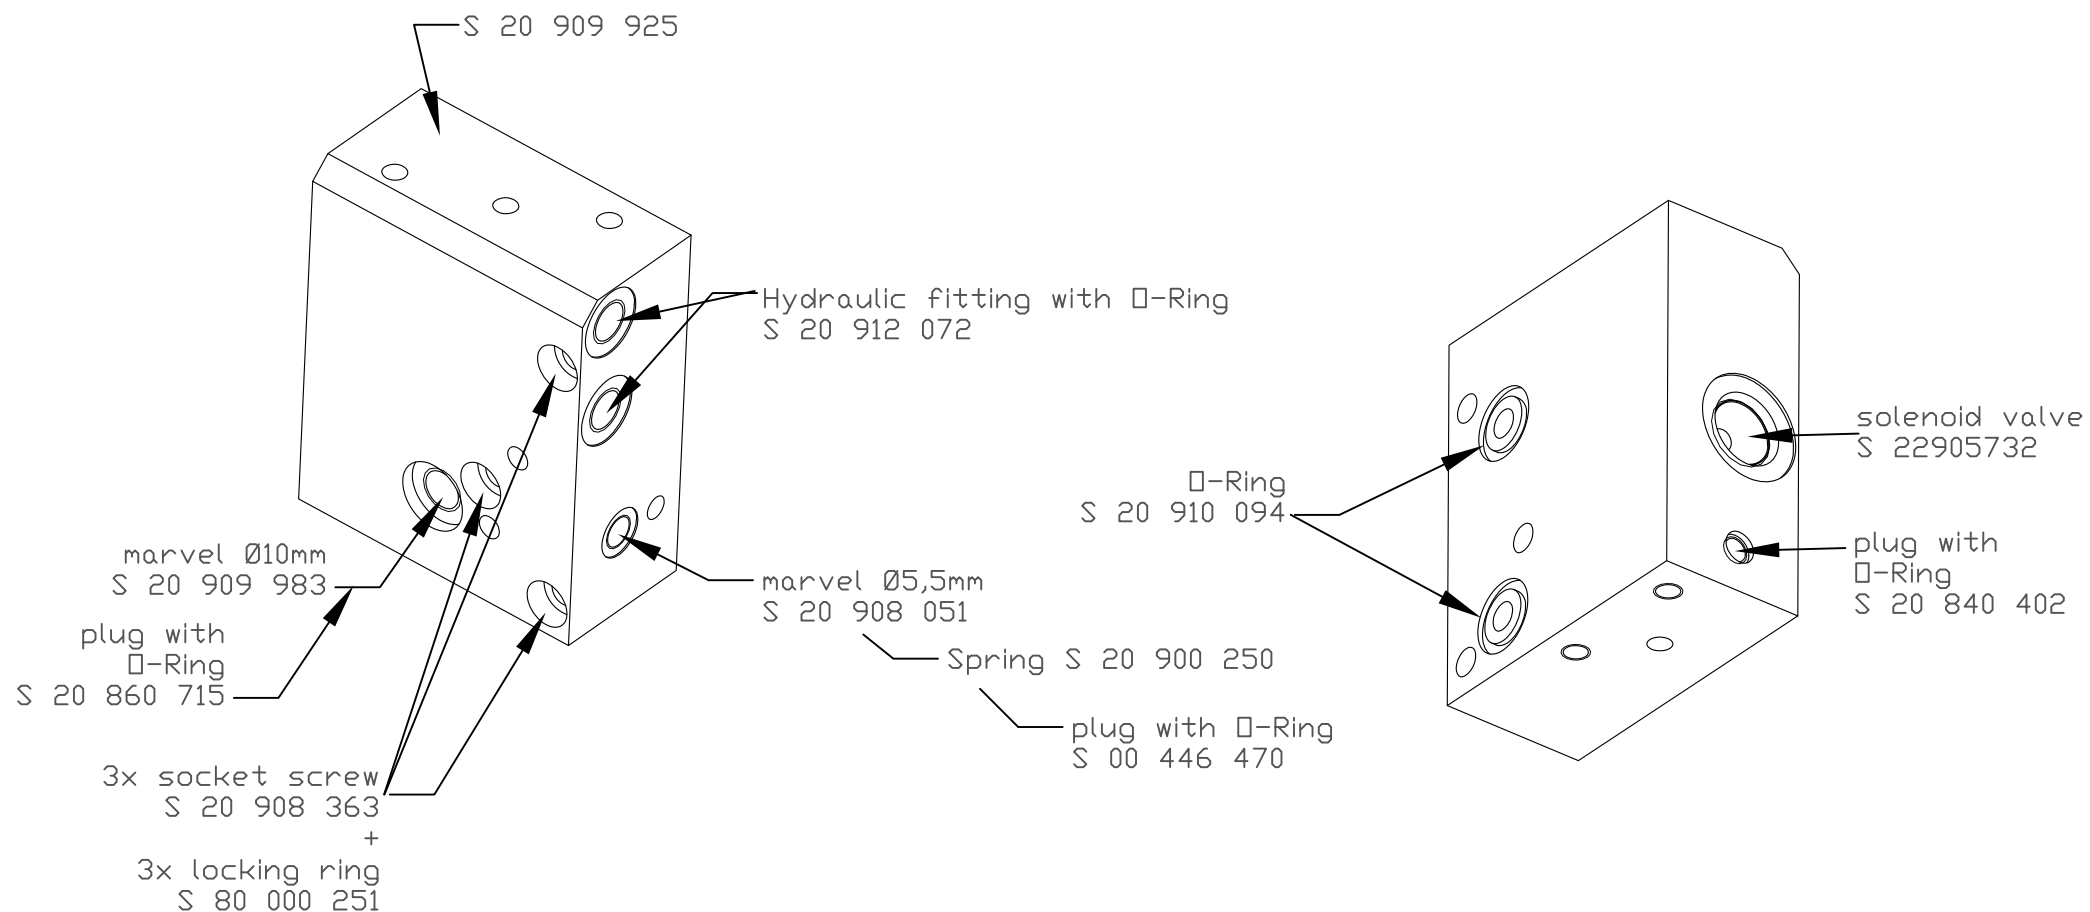

Fittings

by order S + Part.-No.

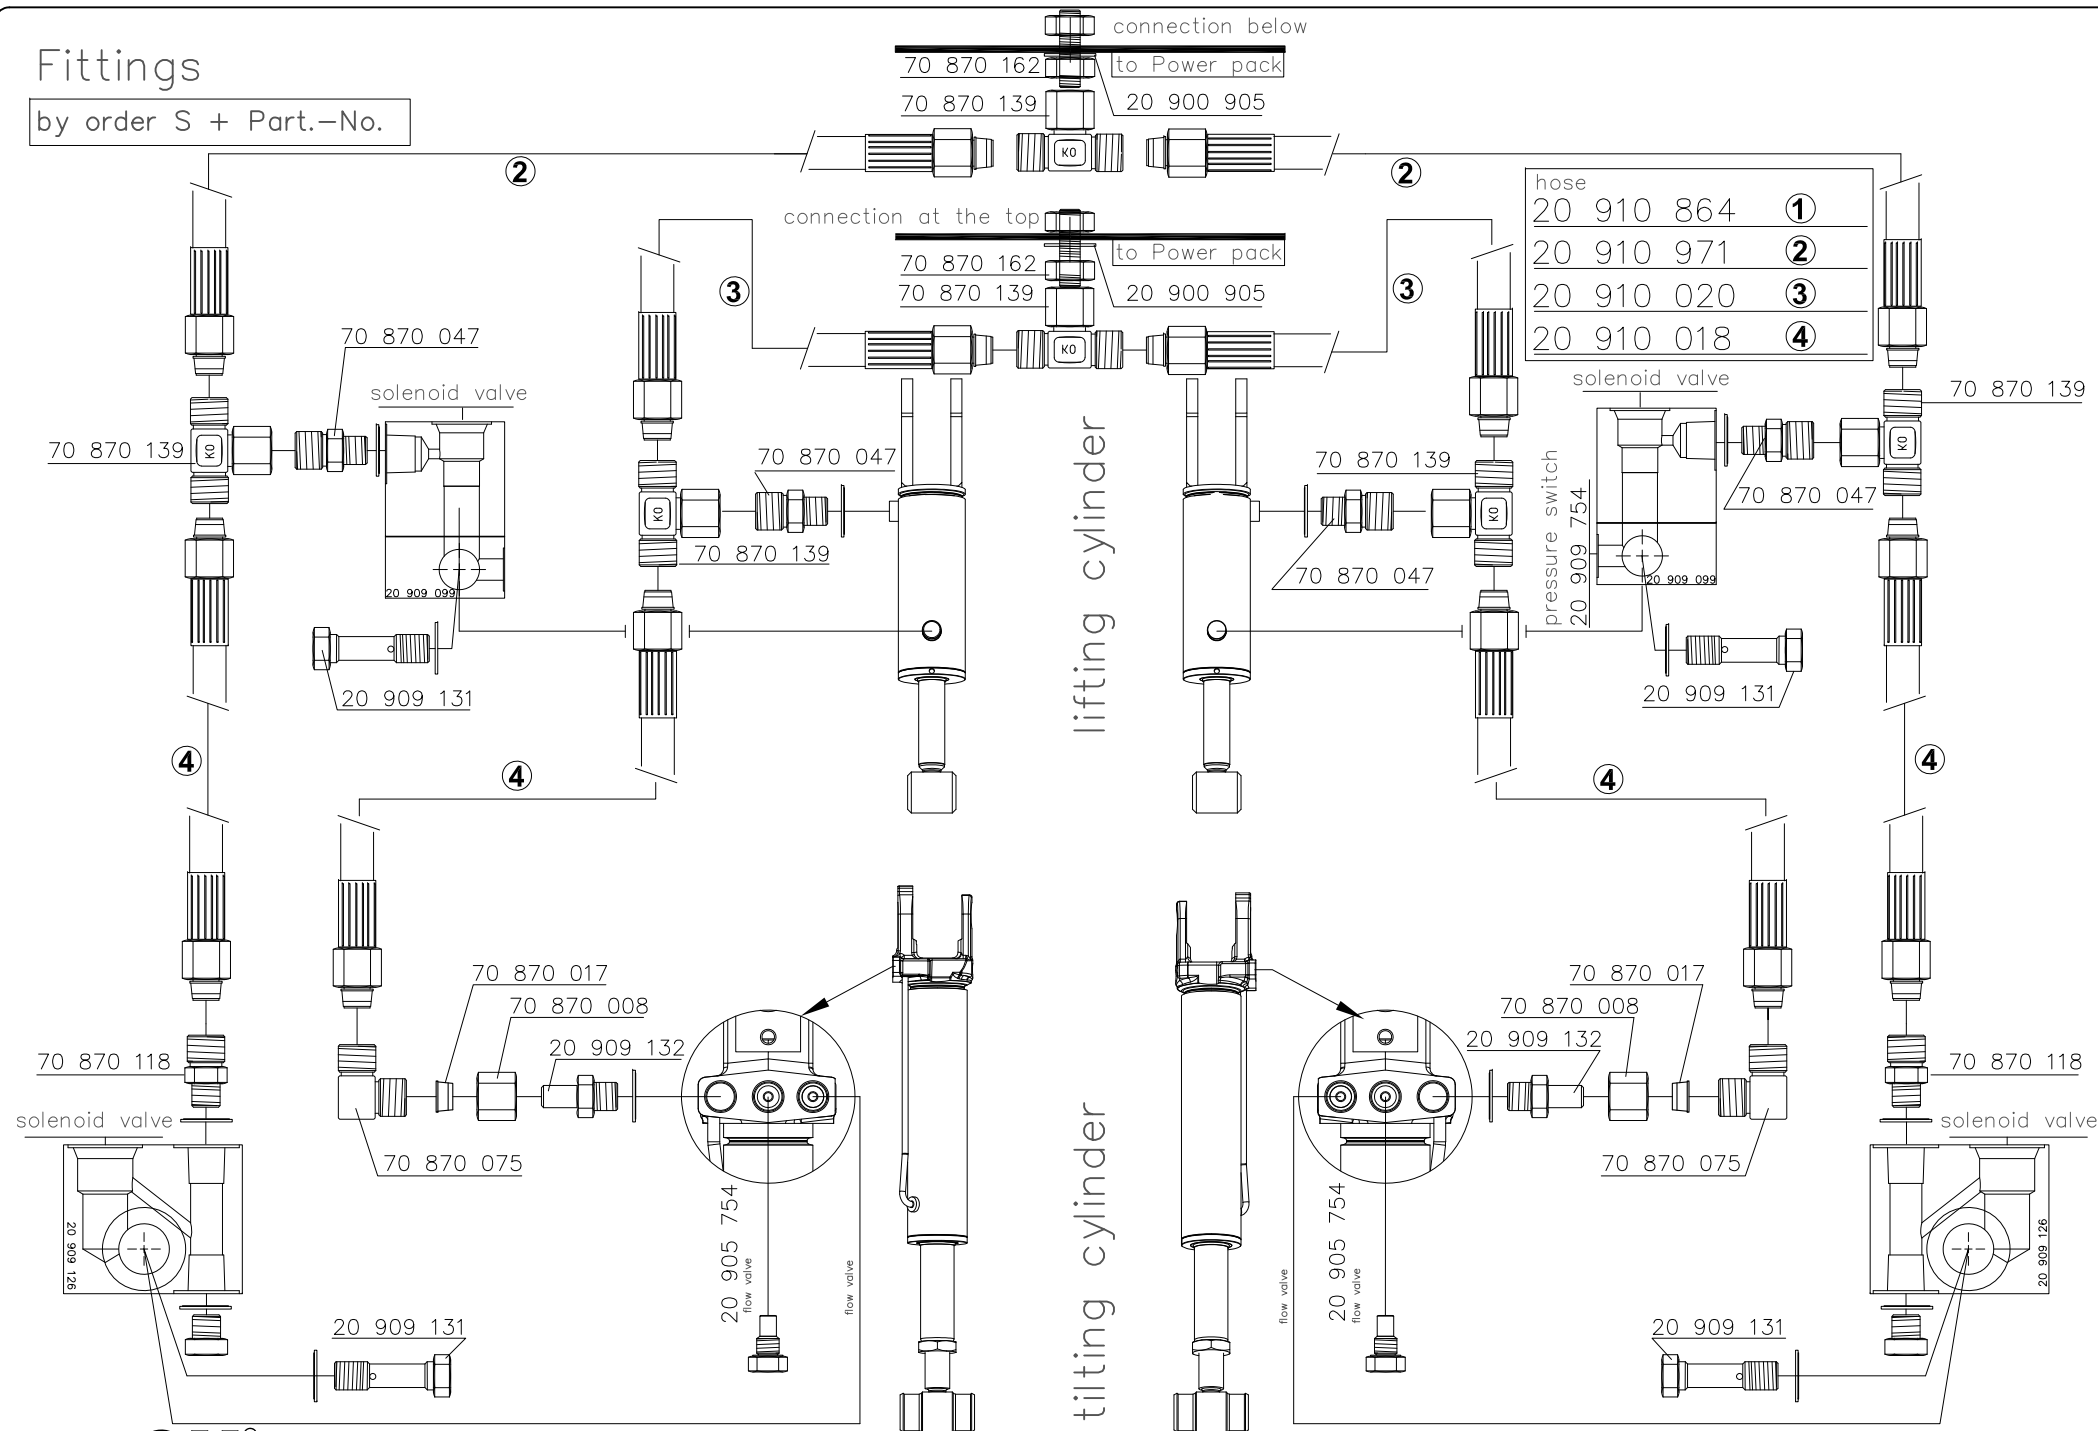


MAXON®

GPC 44 X-4


Document no.: 20 912 634
Version 09.2021

Fittings

by order S + Part.-No.

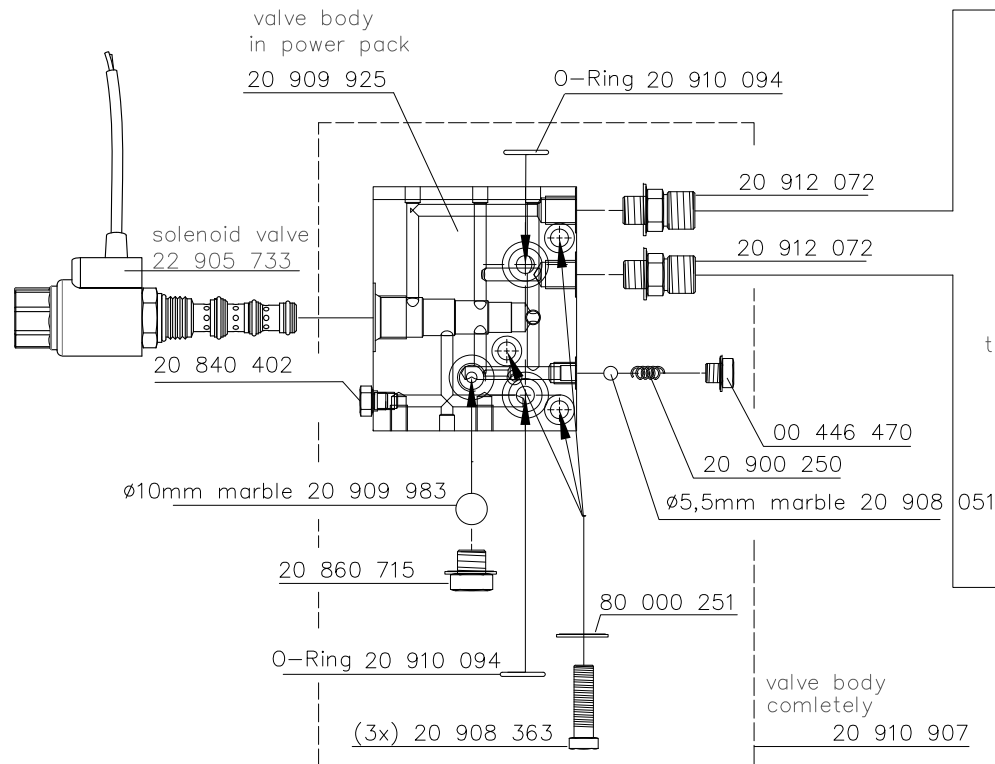

hose	
20 910 864	①
20 909 971	②
20 910 020	③
20 910 018	④

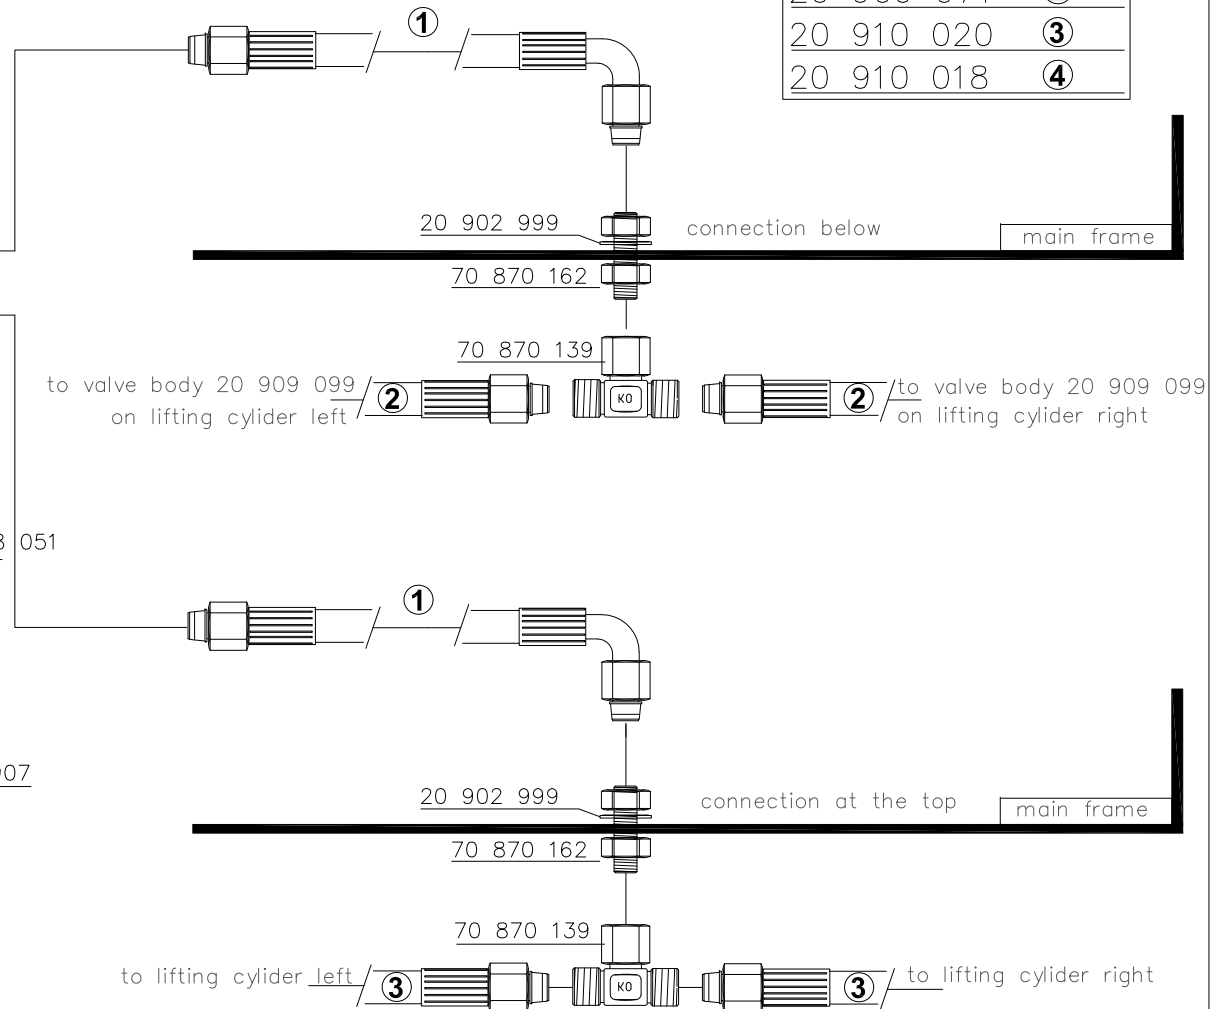

Elektrical connection GPC X-1 and X-4 standard liftgate at series 11

Control-Unit with service switch Series 11
(in the powerpack) with plugs for harness

harness
Part.-No. S 20 911 365

option harness
Part.-No. S 20 911 494
for cabled remote

3-button cabled remote
Part.-No. S 20 911 191
2-button cabled remote
Part.-No. S 20 911 190

harness
Part.-No. S 20 911 364

*4 plug connection
2 or 3 button cabled remote

*3 connection plug
platform

*2 connection plug
MAXON control panel

MAXON control panel
Part.-No. S 20 912 464

*5 option harness
Part.-No. S 20 911 495
for radio control remote

cabin switch on / off
for liftgate
Part.-No. S 20 906 974

option:
control-LED
Part.-No. S 20 905 547

*1 ETMA- connection plug
liftgate on / off switch

MAXON®

Platform

- S 22 911 398 for platform size (a)
- S 22 911 406 for platform size (b)
- S 22 911 398 for platform size (c)
- S 22 911 406 for platform size (d)

- S 22 911 397 for platform size (a)
- S 22 911 405 for platform size (b)
- S 22 911 397 for platform size (c)
- S 22 911 405 for platform size (d)

platform blank (size)

- (a) S 42 220 162 (2130mm x 2490mm)
- (b) S 42 220 159 (1830mm x 2337mm)
- (c) S 42 220 160 (2130mm x 2337mm)
- (d) S 42 220 161 (1830mm x 2490mm)

S 20 913 561

S 20 911 409

S 22 911 396
for all platform sizes

S 20 911 057

S 20 913 560
with flashing relay

S 20 911 409

cable-set series 11

S 20 905 254

S 22 908 672

S 22 908 673

MAXON sign
S 20 905 980

18 x S 20 904 600

S 20 911 445 cable-set
(with flash-light and food-control)

S 20 910 769 cable-set
(without flash-light and food-control)

S 20 911 528 cable-set
(with flash-light and without food-control)

* S 22 911 408
bearing compl.
left+right

S 20 840 208

S 20 840 208

S 20 840 504

S 20 840 504

S 20 909 075

S 20 910 067

S 20 910 058

S 20 910 061

S 20 910 809

S 20 910 164

- S 22 911 400 for platform size (a)
- S 22 911 407 for platform size (b)
- S 22 911 400 for platform size (c)
- S 22 911 407 for platform size (d)

- S 22 911 397 for platform size (a)
- S 22 911 405 for platform size (b)
- S 22 911 397 for platform size (c)
- S 22 911 405 for platform size (d)


S 22 911 399 for all platform sizes

MAXON®

GPC 44 X-4

Document no.: 20 912 634
Version 03.2022

platform set of cables at series 11, GPC X-1 and GPC X-4 standard

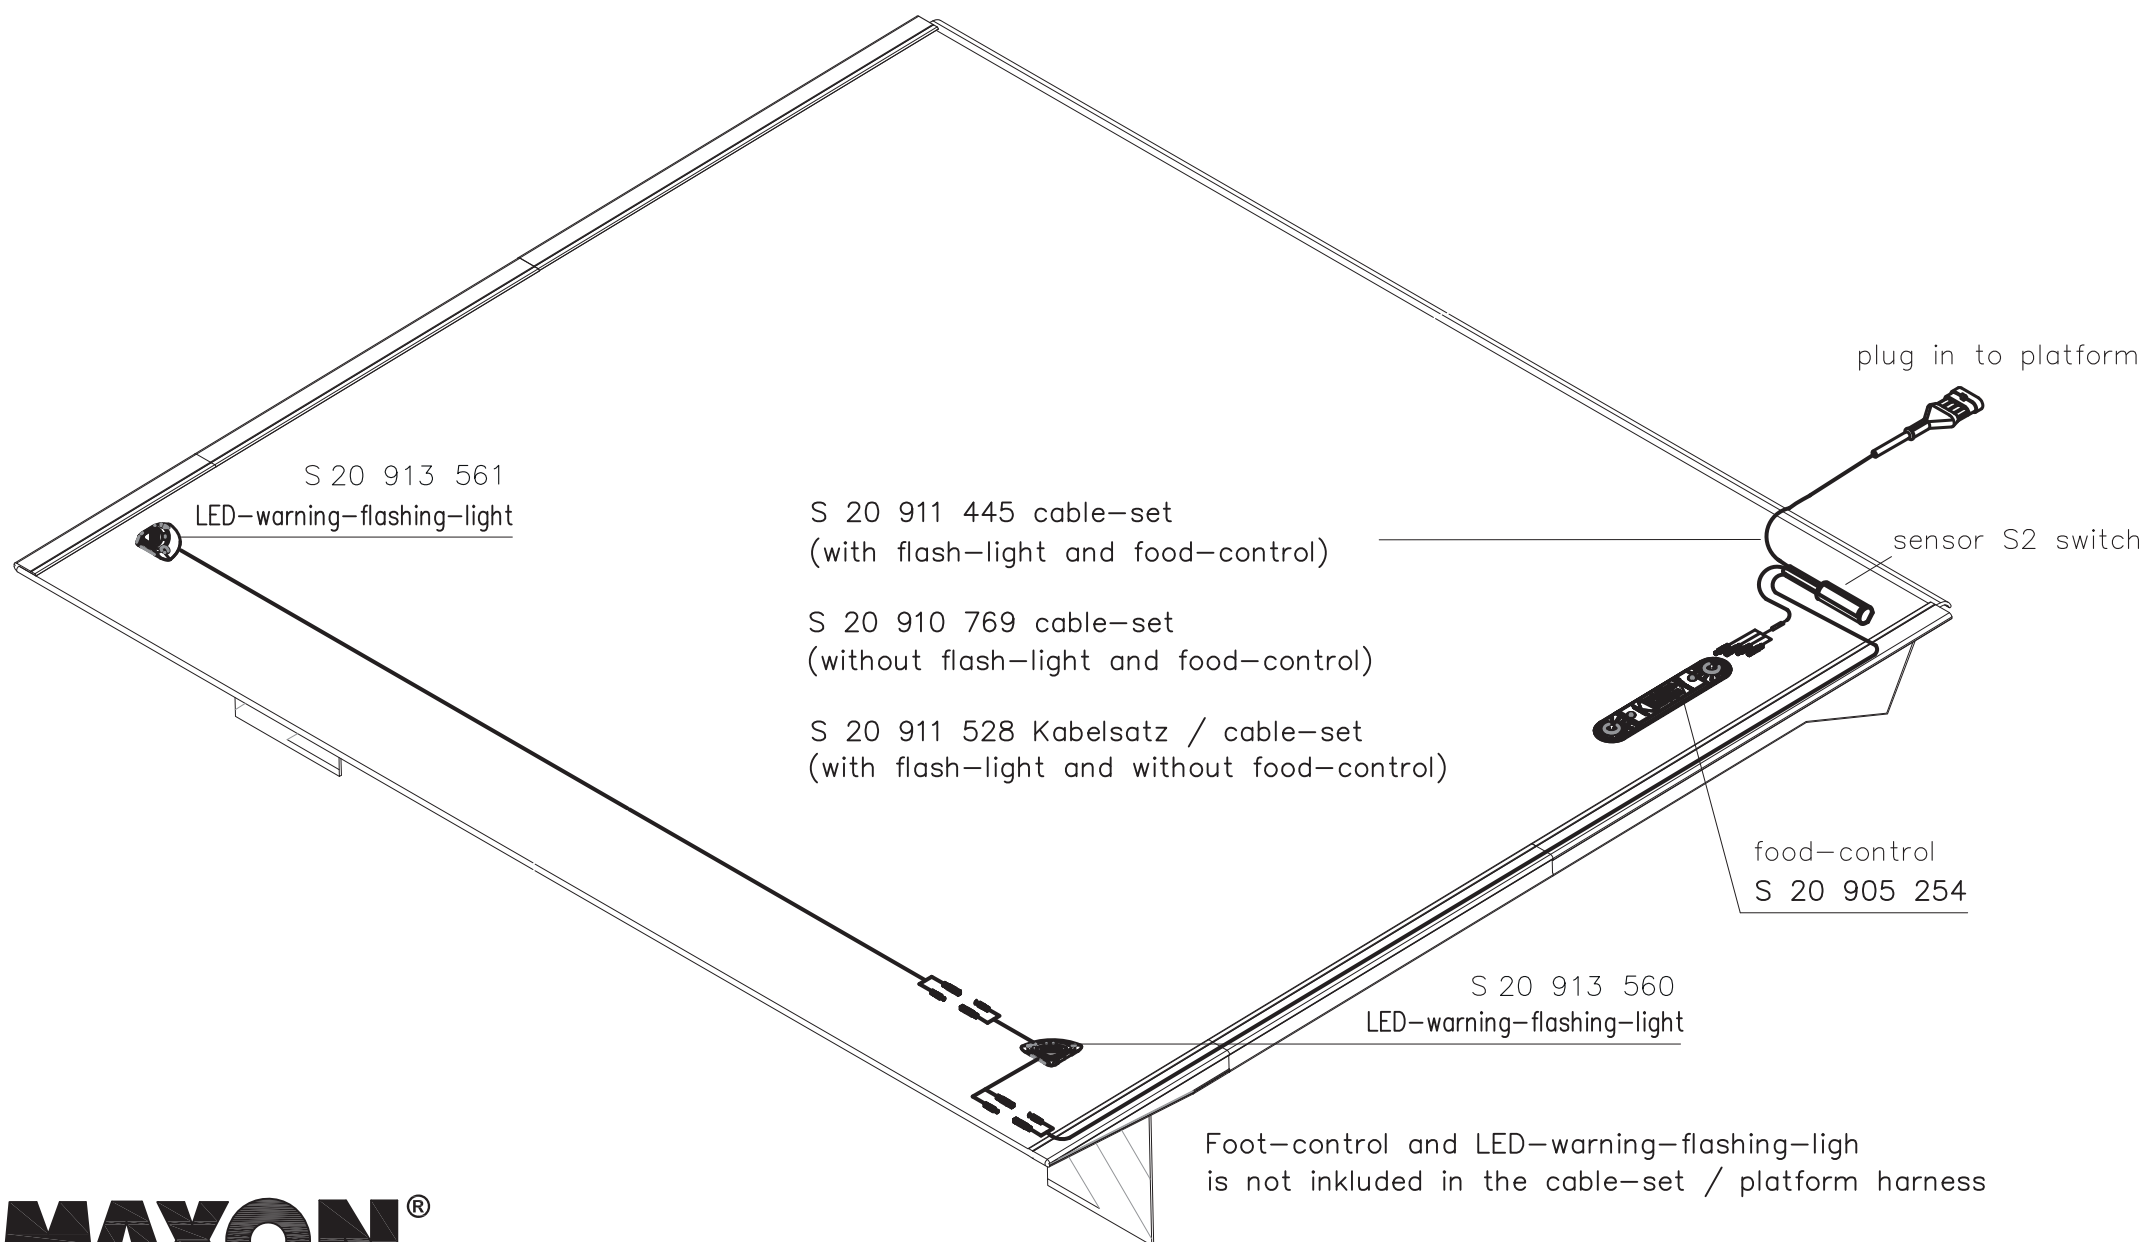


MAXON®

GPC X1 - X4 standard

Series 11
Stand 10.2020

GPC X-1 and GPC X-4 standard Control Unit series 11, Control Panel




S 20 906 974

Wire


S 20 906 975

MAXON
Control Panel
with Screws
incl. Holder
S 20 912 465

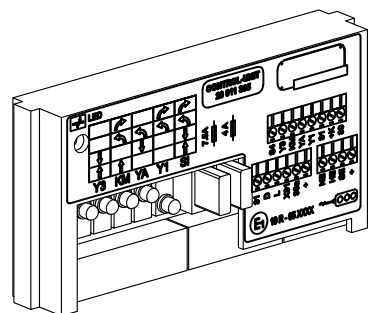

S 20 912 567

MAXON
Control Unit Series 11
with Service Switch

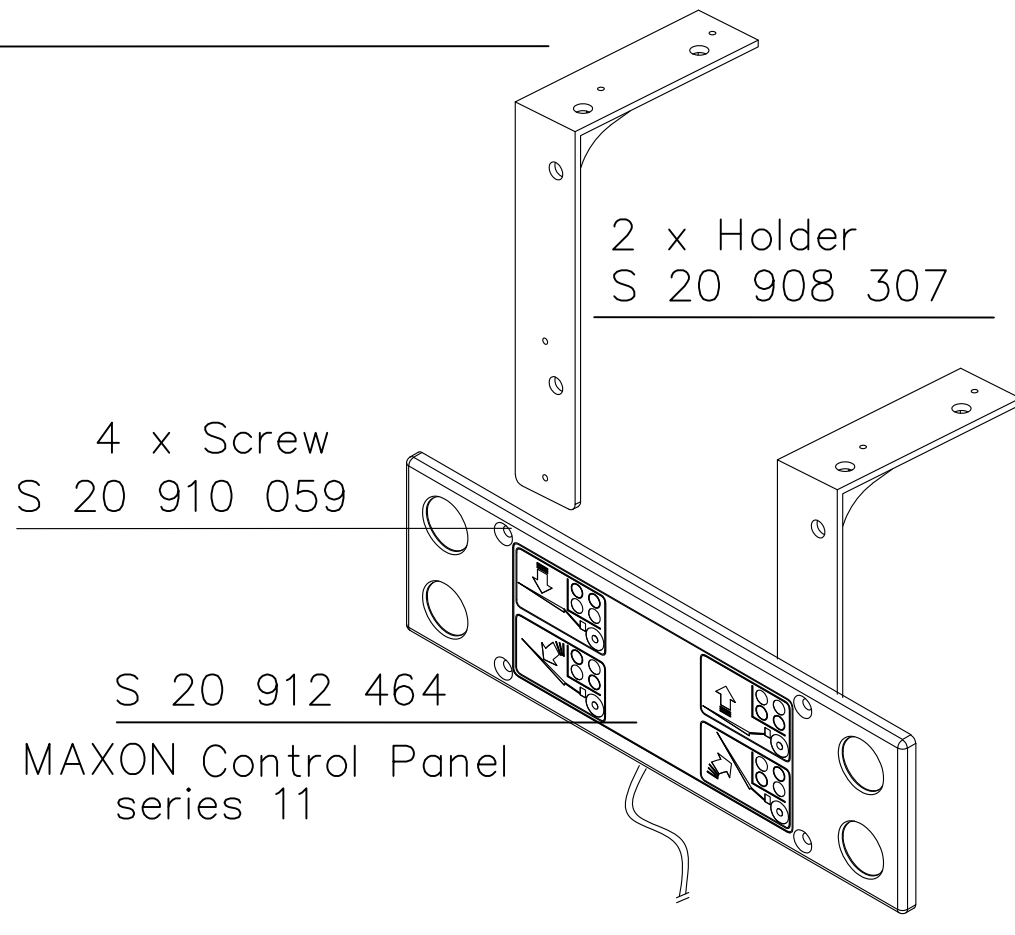

2 x Holder
S 20 908 307

4 x Screw
S 20 910 059

S 20 912 464


MAXON Control Panel
series 11

S 20 911 364 with out picture cable—set for Control Unit series 11


S 20 911 359 with out picture cable—set for Powerpack Series 11

Option Cabled remote


3-Button
cabled remote
S 20 911 191

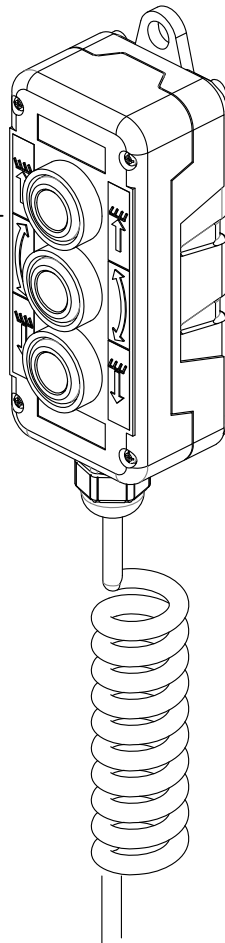

2-Button
cabled remote
S 20 911 190

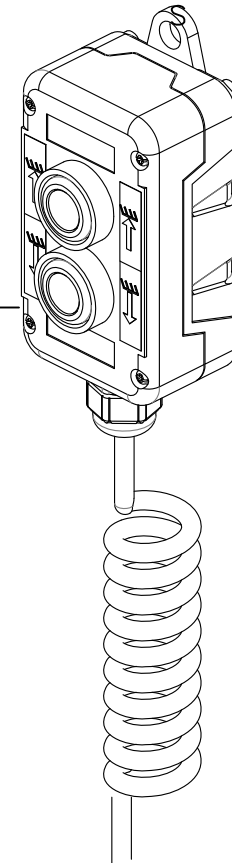

Holder
S 22 905 783

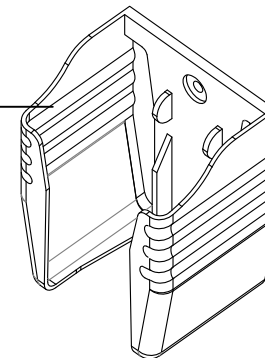

MAXON[®]

GPC X-1 and GPC X-4